

OTLR - IP65 OPERATING THEATRE LUMINAIRE




The IP65 operating theatre luminaire provides efficient and reliable illumination in operating theatre environments.

Constructed from a cold rolled steel housing with powder coated finish, the IP65 operating theatre luminaire features quality drivers and LED componentry. Available complete with mounting brackets and Australian flex and plug.

PRODUCT SPECIFICATIONS

| | |
|-------------------|-------------------|
| Wattage: | 15 - 60W |
| Lumens: | >100Lm/W |
| CCT: | 4000K |
| CRI: | Ra>90 Cyanosis |
| Dimming: | DALI Available |
| Material: | Steel |
| Optic: | Opal Diffused |
| Colour: | White |
| Mounting: | Plaster Recessed |
| IP Rating: | IP65 |
| Lifetime: | L80B10>50,000 hrs |

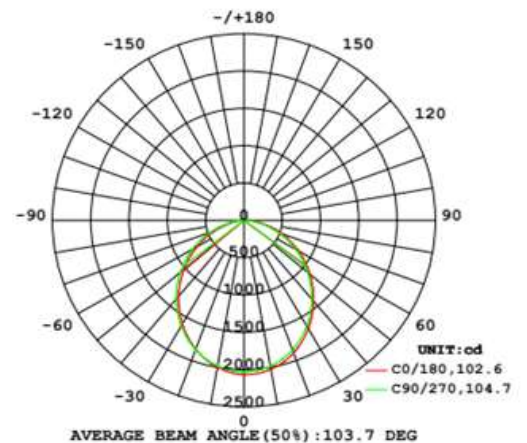

OTLR - IP65 OPERATING THEATRE LUMINAIRE

CODING MATRIX

| Family | | Dimension | | Power | | CCT/CRI | | Dimming | |
|-------------|----------|--------------|------------|-------------|-----|--------------|----------------|----------------|--------------|
| OTLR | Recessed | -1230 | 1200 x 300 | -30W | 30W | -4K9 | 4000K Ra>90 | (Blank) | Non-Dimmable |
| OTLF | Surface | -6060 | 600 x 600 | -40W | 40W | -4KCY | 4000K Cyanosis | -DA | DALI |
| | | | | -50W | 50W | | | | |
| | | | | -60W | 60W | | | | |
| | | -6030 | 600 x 300 | -15W | 15W | | | | |
| | | | | -20W | 20W | | | | |
| | | | | -25W | 25W | | | | |
| | | | | -30W | 30W | | | | |

DIMENSIONAL DIAGRAM

