

# ICON

## VLE66 - SPOTLIGHT & UPLIGHT




The Icon range of spotlights from Vision Lighting are designed with function and aesthetics in mind.

Utilising quality Cree LED componentry in die-cast aluminium housing, the Icon is finished with a 8mm safety glass to an IP66 rating. This robust design incorporates a unique two body design for excellent heat dissipation, ensuring a long 50,000hr LED life

The Icon is available in a range of beam angles and wattages making it an ideal choice for a range of exterior architectural lighting applications.

### PRODUCT SPECIFICATIONS

<b>Wattage:</b>	15W 20W 30W 35W 45W 60W 75W
<b>Lumens:</b>	1380Lm - 8250Lm
<b>Efficacy:</b>	>92Lm/W
<b>CCT:</b>	3000K   4000K
<b>CRI:</b>	Ra>80
<b>Beam Angle:</b>	3.5° 12° 30° 60°  10x70°
<b>Material:</b>	Aluminium
<b>Colour:</b>	Grey
<b>IP Rating:</b>	IP66
<b>Mounting:</b>	Surface Mount
<b>Lifetime:</b>	50,000 hrs

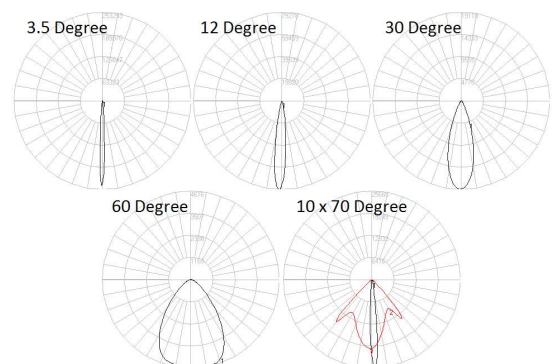

# ICON


## VLE66 - SPOTLIGHT & UPLIGHT

### CODING MATRIX


Family	Power	Lumens	CCT	Beam Angle	Trim Colour	Dimming
VLE66-15	-15W	15W	1380Lm	-3K 3000K	(Blank) Grey	(Blank) Non-Dimming
	-20W	20W	2200Lm	-4K 4000K		-DA DALI
VLE66-18	-22W	30W	3300Lm	-30D		
	-30W	30W	3300Lm	-60D		
VLE66-21	-35W	35W	3220Lm	-E70		
	-45W	45W	4950Lm			
VLE66-26	-60W	60W	5521Lm			
	-75W	70W	8250Lm			

### DIMENSIONAL DIAGRAM


15W / 20W

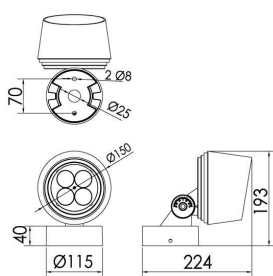


22W / 30W

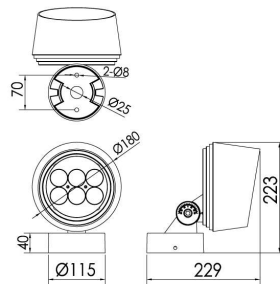

35W / 45W

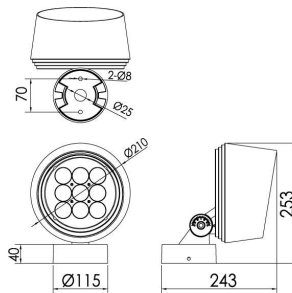

60W / 75W

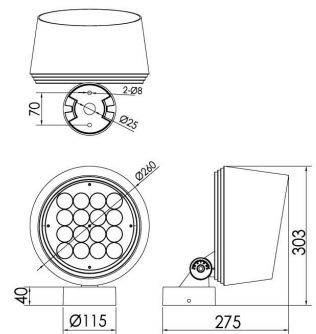

# ICON

## VLE66 - SPOTLIGHT & UPLIGHT

---

