

GLIDE

TL22 - CYLINDRICAL LED TRACK LIGHT

Versatile Illumination



The Glide range of LED track luminaires from Vision Lighting provide exceptional flexibility for both general and feature illumination.


The versatile track set up allows for unparalleled flexibility and the ability to position the Glide as desired on the track mounting. The 350° horizontal rotation and 90° vertical rotation ensures the ability to aim light where it is required.

Constructed from die-cast aluminium, the Glide is also available in a variety of wattages and beam angles to meet your project requirements.



PRODUCT SPECIFICATIONS

Wattage:	12W 19W 25W 28W
Lumens:	1170Lm 1465Lm 1950Lm 2245Lm
CCT:	2700K 3000K 4000K
CRI:	Ra>80 Ra>90
Beam Angle:	15° 24° 36° 55°
Dimming:	DALI Available
Material:	Die-Cast Aluminium
Reflector:	Specular Aluminium
Colour:	White Black Silver
IP Rating:	IP20
Mounting:	3 Circuit track
Lifetime:	L70B10>55,000hr L80B10 50,000hr

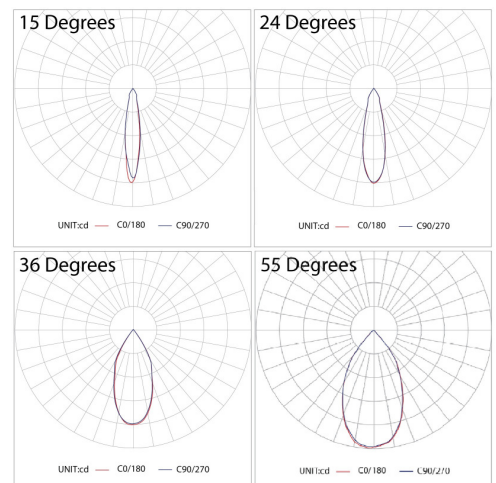


GLIDE

TL22 - CYLINDRICAL LED TRACK LIGHT

CODING MATRIX

Family	Power			CCT		CRI		Beam Angle		Trim Colour		Dimming			
TL22	12	12W	1170Lm	-2K	2700K	(Blank)	Ra>80	-15D	15°	-WT	White	(Blank)	Non-Dimmable		
	19	19W	1465Lm	-3K	3000K		-9	Ra>90	-24D	24°	-BK		Black	-DA	DALI
	25	25W	1950Lm	-4K	4000K				-36D	36°	-SV		Silver		
	28	28W	2245Lm						-55D	55°					

DIMENSIONAL DIAGRAM

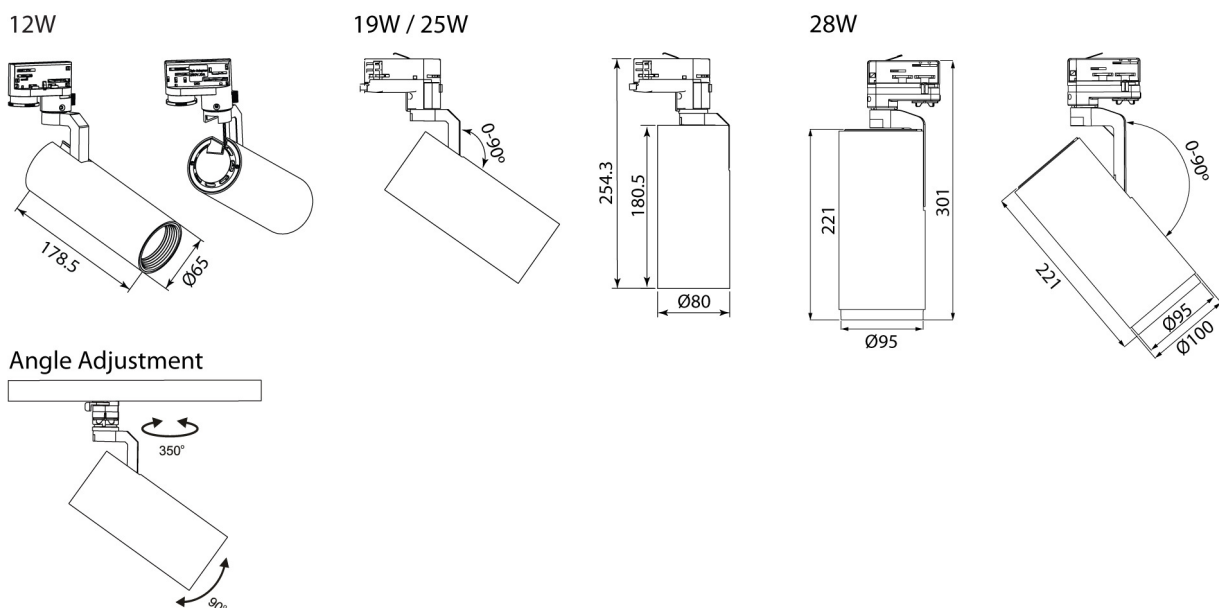

GLARE SHIELD ACCESSORIES

Accessories available for this track light include a visor glare shield, an adjustable 'barn-door' glare shield for greater control, and a honey-comb louver glare shield.

