

FLARE

OLE8 - LOW PROFILE IP54 LED OYSTER LIGHT



The Flare oyster luminaire from Vision Lighting is compact and unobtrusive, and features a very low profile. Designed to seamlessly blend into the ceiling, the polycarbonate diffuser ensures an even light distribution.

Perfect for ceilings where recessed downlights are not practical, the Flare is suitable for a variety of applications including for use in offices, schools and retail. With an IP54 rating, it is also ideal for use in wet areas, such as kitchens and laund


Constructed from fire-rated polycarbonate, the Flare comes complete with a bracket on the back to mount it to the ceiling for easy installation.

Simple to install, with a bracket on the back to mount it to the ceiling. The housing and diffuser are both made from fire-rated polycarbonate.



PRODUCT SPECIFICATIONS

Wattage:	12W / 18W / 25W / 30W
Lumens:	1260 - 3060Lm
Efficacy:	105 Lm/W (For 4000K)
CCT:	3000K / 4000K
Beam Angle:	120 Degrees
Dimming:	None / Triac Universal
Material:	Polycarbonate
Colour:	White / (Black/Grey Special Order)
IP Rating:	IP54
Mounting:	Surface Mount (Ceiling)

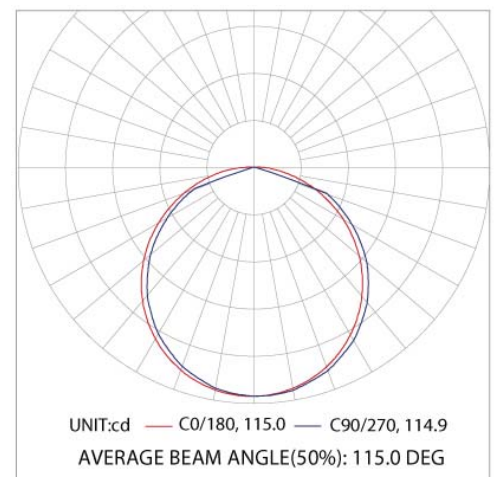


FLARE

OLE8 - LOW PROFILE IP54 LED OYSTER LIGHT

CODING METHODOLOGY

Family	Power				CCT		Trim Colour	Dimming	Options
OLE8	12	12W	1260Lm	250mmØ	-3K	3000K	(Blank) White	(Blank) None	-EM Emergency
	18	18W	1890Lm	300mmØ	-4K	4000K	-BLK Black	-D Triac Universal	-SEN Sensor
	25	25W	2550Lm				-GRY Grey		
	30	30W	3060Lm	400mmØ					

DIMENSIONAL DIAGRAM

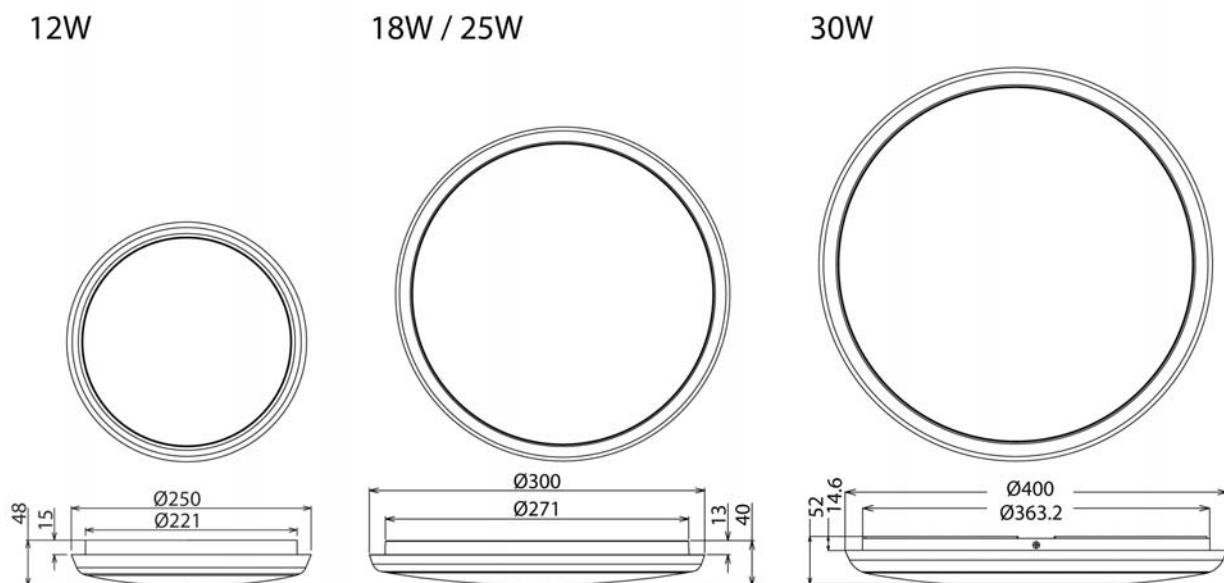

INSTALLATION

Stainless steel bracket is mounted to the ceiling first. Hard wired to enclosed terminal block. Fitting attaches to this using a grub screw at each end, which tightens the fitting up to the ceiling. Surrounding neoprene gasket seals off the space behind the fitting from the room below.

