

FACADE

VLE81 - 40W LED LINEAR PROJECTOR / WALL WASHER



The Façade floodlight from Vision Lighting couples a sturdy strong linear design with a sleek appearance to provide a fitting that is aesthetically pleasing and able to withstand the elements.


Constructed from toughened glass on an aluminium alloy body to IP66, the Façade features excellent heat dissipation to ensure the longevity of the quality Cree LED componentry.

Available in multiple beam options, the Façade provides the flexibility to provide the perfect wall wash to suit your specific design requirements.



PRODUCT SPECIFICATIONS

Wattage:	7W - 40W
Input Voltage:	12 - 24Vdc
Efficacy:	>60Lm/W
CCT:	3000K / 4000K
CRI:	>80
Beam Angle:	12.5° / 20° / 30° / 60° / 15°x30° / 10°x60°
Material:	Aluminium
Colour:	Grey
IP Rating:	IP66
Mounting:	Baseplate or Trunnion
Light Source:	Cree LED
Lifetime:	50,000 hrs

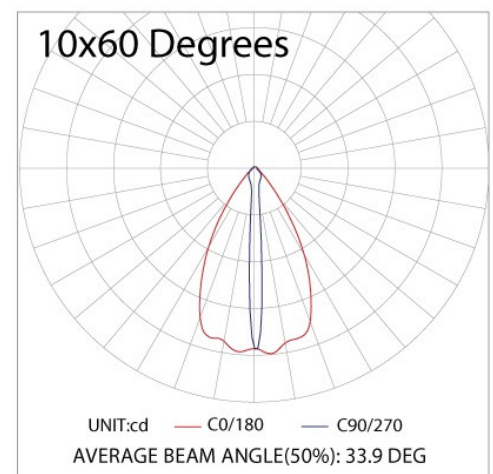


FACADE

VLE81 - 40W LED LINEAR PROJECTOR / WALL WASHER


CODE BUILDER

Family	Power	Lumens	Length	CCT	Beam Angle	Colour
VLE81	-7W	455Lm	(300mm)	-3K 3000K	-12D 12.5 Degrees	(Blank) Black
	-10W	715Lm	(500mm)	-4K 4000K	-20D 20 Degrees	-GRY Grey
					-30D 30 Degrees	
	-20W	1300Lm			-60D 60 Degrees	
	-26W	1690Lm	(1000mm)		-E30 Elliptical 15x30 Degrees	
	-40W	2600Lm			-E60 Elliptical 10x60 Degrees	

DIMENSIONAL DIAGRAM

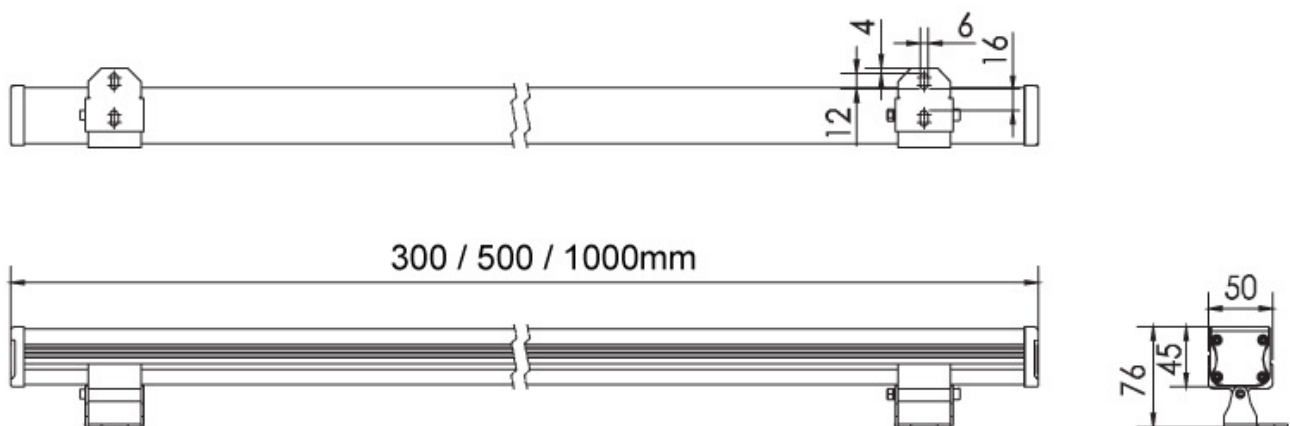

DISTRIBUTION OPTIONS

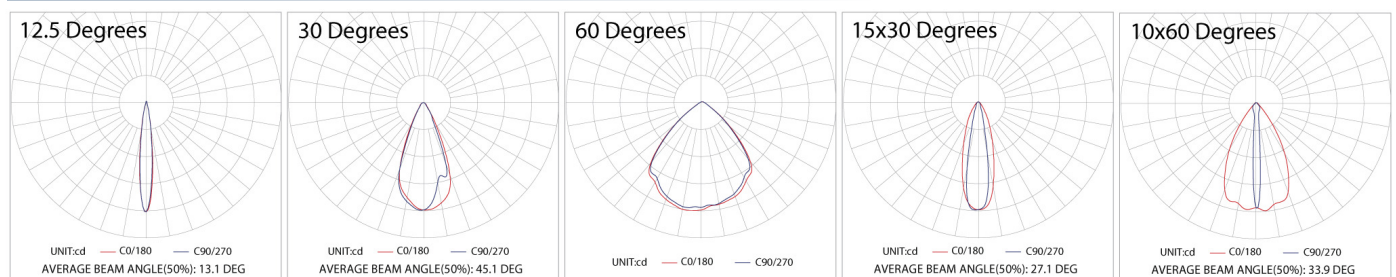

FACADE

VLE81 - 40W LED LINEAR PROJECTOR / WALL WASHER

WIRING DIAGRAM

Supplied complete with plugs, sockets and through wiring for ease of install. Accessories available include sockets which can be hard wired to the drivers, and caps for the final luminaire in a row.

