

CELESTE

DLG84 - IP65 LOW GLARE DOWNLIGHT
















The Celeste downlight is designed specifically for commercial and industrial projects. Our downlight utilizes advanced LED technology, delivering efficient and high-quality illumination suitable for indoor and outdoor applications.

With an IP65 rating, the Celeste is built to withstand harsh environments, providing efficiency, durability and reliability. Its low-glare design ensures visual comfort, making it ideal for various settings, such as schools, hospitals, and commercial space

An excellent choice for engineers seeking a high-performance lighting solution. Its versatility makes it perfect for various commercial and industrial projects, providing excellent value for its efficiency and reliability.

PRODUCT SPECIFICATIONS

Wattage:	6W 13W 18W 25W 30W			
Lumens:	350-3300 Lm			
CCT:	3000K 4000K			
CRI:	Ra>80 Ra>90 Cyanosis			
Beam Angle:	75° (95&110mm) 90° (150&172mm)			
Dimming:	Std Non-Dimmable DALI			
Material:	Aluminium Housing			
Diffuser:	Polycarbonate			
Colour:	White			
IP Rating:	IP65 from below			
IK Rating:	IK08			
Mounting:	Plaster Recessed			
Lifetime:	L80B10>50,000hr			



Phone: 1300 474 878

www.visionlighting.net

sales@visionlighting.net




CELESTE

DLG84 - IP65 LOW GLARE DOWNLIGHT

CODING MATRIX

Family	Trim Size	Diameter	Cutout	Power	Power	Lm	CCT/CRI		Colour		Dimmin	g
DLG84	-09	95mm	83mm	-6W	6W	350-600Lm	-3K-9	3000K Ra>90	-WT	White	(Blank)	Non-Dimmable
	-11	110mm	90-95mm	-13W	13W	810-1300Lm	-4K-9	4000K Ra>90			-DA	DALI
	-15	150mm	125-140mm	-18W	18W	1500-1950lm	-4KCY	4000K Cyanos	sis			
	-17	172mm	150-165mm	-25W	25W	2150-2750lm	-TW-9	Tunable				
				-30W	30W	2570-3300lm						
	95mm	110mm	150mm 3	172mm								
6W	Υ											
13W		Υ										
18W			Υ	Υ								
25W			Υ	Υ								
30W				Υ								

DIMENSIONAL DIAGRAM

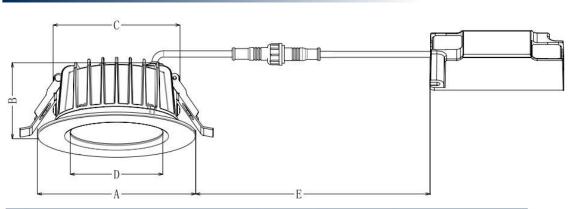

Trim Size	Α	В	С	D	E	Cutout
95mm	95	46	81	58	300	83-85mm
110mm	110	51	88.2	64.4	300	90-95mm
150mm	150	64	123.6	98.2	300	125-140mm
172mm	172	69	146.6	120.4	300	150-165mm



CELESTE

DLG84 - IP65 LOW GLARE DOWNLIGHT

INSTALLATION

