GEMINI

DLG06 - LOWGLARE DOWNLIGHT

The Gemini downlight from Vision Lighting boasts superior distribution & performance.
Ideal for offices and other commercial spaces. The distribution shape finds the perfect balance between low-glare and high uniformity.
Higher performance and lifetime achieved through world-class componentry. The Gemini is IP54 rated from below making it suitable for use in moist areas.

PRODUCT SPECIFICATIONS

Wattage:	13W | 18W | 25W
CCT:	3000K | 4000K
CRI:	Ra>90
Beam Angle:	80°
Dimming:	DALI|Casambi|Phase Dimming
Material:	Aluminium
Colour:	White|Black
Mounting:	Recesssed
IP Rating:	IP54 from below
Lifetime:	L80B10>50,000hrs

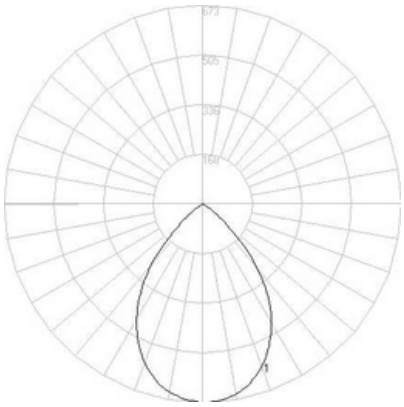

Vision Lighting Supplies Pty Ltd
10 Pinnacle Place
Somersby NSW 2250

Phone: 1300 474 878
www.visionlighting.net
sales@visionlighting.net

GEMINI

DLG06 - LOWGLARE DOWNLIGHT

CODING MATRIX

Family	Dimension		Power		CCT/CRI		Trim Colour		Reflector Colour		Dimming	
DLG06	-11	110mm	-10W	13W	-3K9	3000K	-WT	White	(Blank)	Bright Silver	(Blank)	Non-Dimmable
			-13W	13W	-4K9	4000K	-BK	Black	MS	Matt Silver	-DA	DALI
	-14	145mm	-13W	13W					WT	White	-CA	Casambi
			-18W	18W					BK	Black	-DP	Phase Dimming
			-25W	25W								
	-17	172mm	-18W	18W					*Non standard reflector styles reduce output*			
			-25W	25W					*See images below*			
			-35W	35W								

DIMENSIONAL DIAGRAM

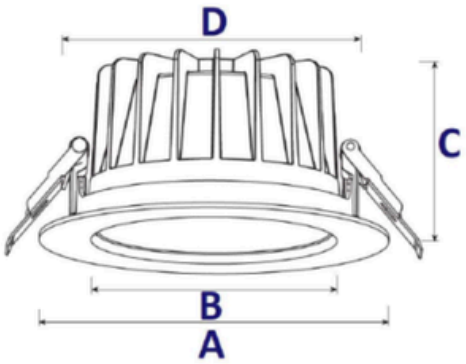

Family	A	B	C	D
DLG06-11	110	96	54	86
DLG06-14	145	102	78	120
DLG06-17	172	127	90	145

REFLECTOR STYLES

Bright Silver
Standard lumen

Matt Silver
15% lumen decrease

White
10% lumen decrease

Black
30% lumen decrease

Vision Lighting Supplies Pty Ltd
10 Pinnacle Place
Somersby NSW 2250

Phone: 1300 474 878
www.visionlighting.net
sales@visionlighting.net