

DESTINY

LBLE26 - SURFACE MOUNT LED LOWBAY



The Destiny Lowbay from Vision Lighting provides LED illumination in under-canopy applications, including entrance zones for underground car parks.


A surface mounted enclosed low-profile LED luminaire with IP65 and IK08 ratings, the Destiny features an optical distribution perfect for maximising spacing and uniformity in undercover applications, even where the ceiling height is low.

Constructed from aluminium alloy and featuring high quality componentry, including Nichia SMD chips, enables the Destiny to achieve an output of >140 Lm/W.



PRODUCT SPECIFICATIONS

Power:	24W / 40W / 60W
Lumens:	3360 / 5200 / 7800Lm
Efficacy:	140Lm/W
CCT:	3000 / 4000K / 5000K
Beam Angle:	110 Degrees
Dimming:	None Standard / DALI optional
Material:	Aluminium
IP Rating:	IP65
IK Rating:	IK08
Mounting:	Surface Mount
Driver:	Sosen
Light Source:	Nichia
Lifetime:	>50,000

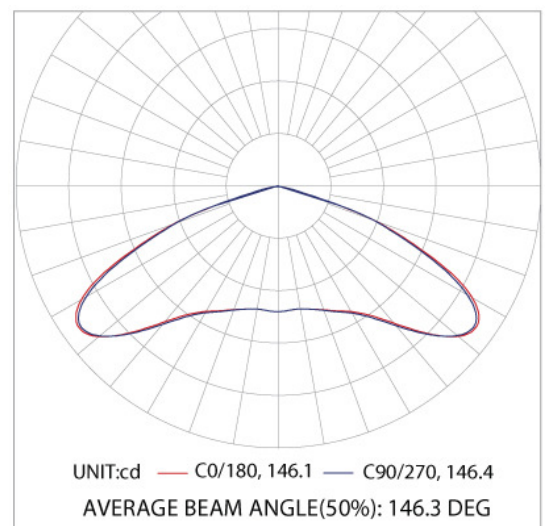



DESTINY

LBLE26 - SURFACE MOUNT LED LOWBAY

CODING MATRIX

Family	Power		Lumens	CCT		Dimming	
LBLE26	20	24W	3360Lm	-3K	3000K	(Blank)	None
	40	40W	5200Lm	-4K	4000K	-DA	DALI control
	60	60W	7800Lm	-5K	5000K		

DIMENSIONAL DIAGRAM

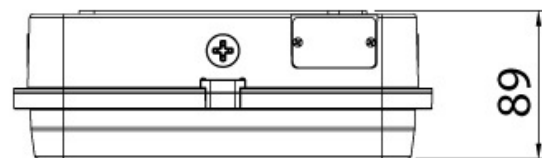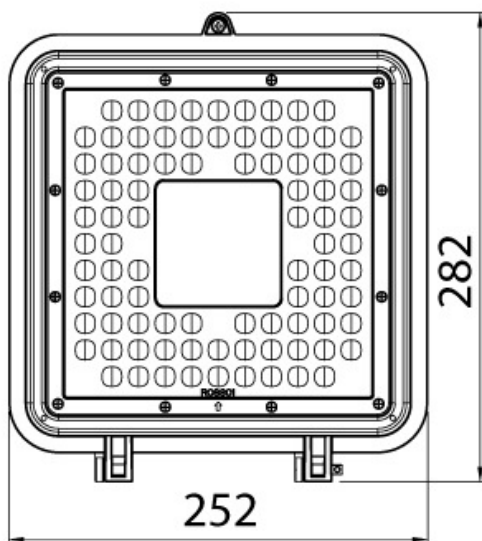

2.5kg± 0.3kg