

## CLR06 - IP65 CLEANROOM LUMINAIRE




The IP65 Cleanroom provides efficient and reliable illumination in cleanroom environments. Suitable for use in areas where protection against dust, moisture, and contaminants is critical.

Constructed from a cold rolled steel housing with powder coated finish, the IP65 Cleanroom features quality drivers and LED componentry. The Cleanroom is available complete with mounting brackets and Australian flex and plug.

### PRODUCT SPECIFICATIONS

<b>Wattage:</b>	15 - 50W
<b>Lumens:</b>	>100Lm/W
<b>CCT:</b>	4000K
<b>CRI:</b>	Ra>90 Cyanosis
<b>Dimming:</b>	DALI Available
<b>Material:</b>	Steel
<b>Optic:</b>	Opal Diffused
<b>Colour:</b>	White
<b>Mounting:</b>	Plaster Recessed
<b>IP Rating:</b>	IP65
<b>Lifetime:</b>	L80B10>50,000 hrs

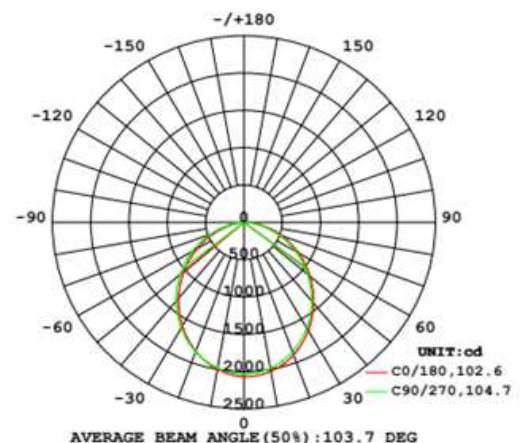

# CLR06 - IP65 CLEANROOM LUMINAIRE

## CODING MATRIX

Family		Dimension		Power		CCT/CRI		Dimming	
CLR06	Recessed	-1230	1200 x 300	-30W	30W	-4K9	4000K Ra>90	(Blank)	Non-Dimmable
CLR06F	Surface	-6060	600 x 600	-40W	40W	-4KCY	4000K Cyanosis	-DA	DALI
				-50W	50W				
		-6030	600 x 300	-15W	15W				
				-20W	20W				
				-25W	25W				

## DIMENSIONAL DIAGRAM

