

CLEANROOM

CLR01 - LED SEALED CLEANROOM FITTING




The Cleanroom from Vision Lighting is a recessed troffer with an IP54 rating, the Cleanroom is ideal for use in controlled areas such as banks, schools, universities, libraries and hospitals.

Constructed from a cold rolled steel housing with powder coated finish and PMMA reeded diffuser, the Cleanroom features quality componentry in the form of a Samsung driver and Osram LEDs.

The Cleanroom is available complete with mounting brackets and Australian flex and plug.

PRODUCT SPECIFICATIONS

Wattage:	30W 40W 50W
Lumens:	2335Lm 3035 Lm 3688 Lm
CCT:	3000K 4000K
CRI:	Ra>80
Beam Angle:	120 Degrees
Dimming:	DALI Available
Material:	Cold roll steel housing
Diffuser:	Y5 reeded
Colour:	White
IP Rating:	IP54
Mounting:	Plaster recessed
Lifetime:	L90B10>60,000 hours

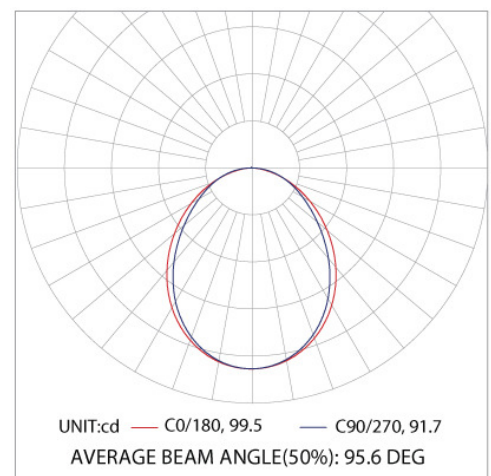


CLEANROOM

CLR01 - LED SEALED CLEANROOM FITTING

CODING MATRIX

Family	Size	Power	CCT	Dimming
CLR01	-1230 1200 x 300mm	-30W 30W 2335Lm	-3K 3000K	(Blank) None
		-40W 40W 3035Lm	-4K 4000K	-DA DALI Dimmable
		-50W 50W 3688Lm		

DIMENSIONAL DIAGRAM

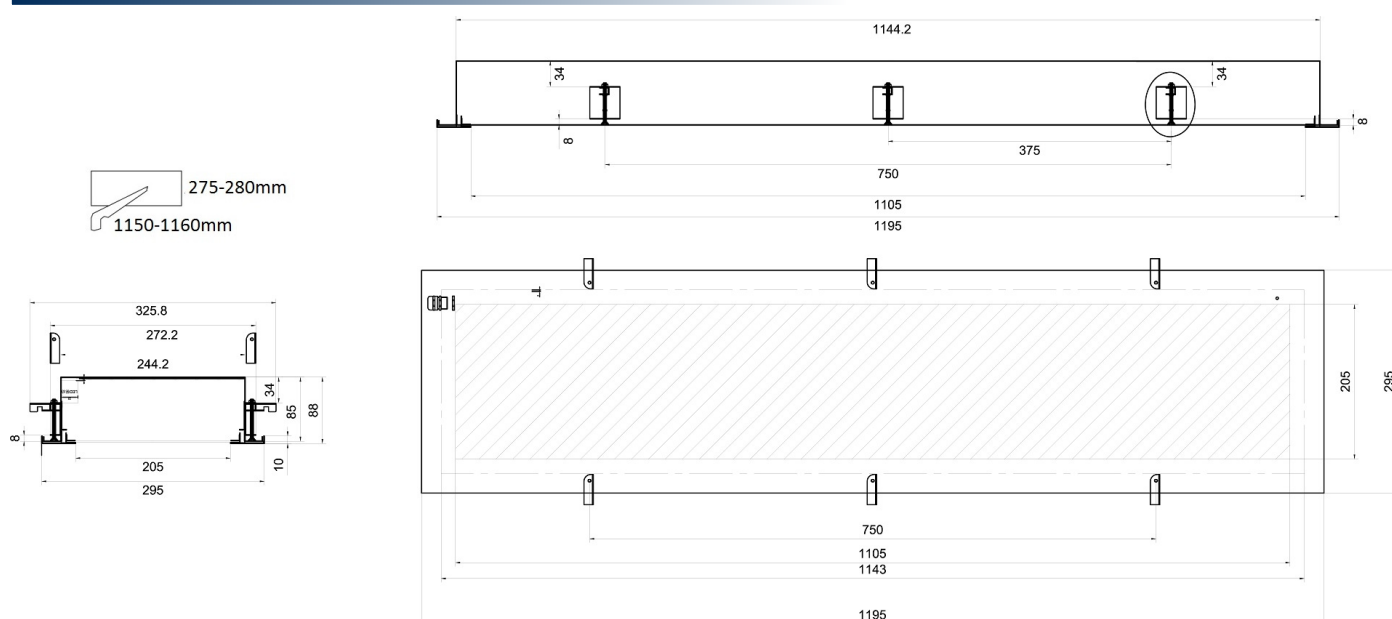

MOUNTING BRACKET

The Vision Lighting Cleanroom is designed to not only achieve an IP54 rating for itself, but also to seal the ceiling space off from the room below.

The neoprene gasket around the light is held firmly in place by positive pressure from the screw-up mounting brackets.

