

BENDER V

BENDV - VERTICALLY BENDING IP68 STRIP LIGHT




The Bender V range of flexible strip lighting provides a unique opportunity to integrate creative lighting effects in your project. Featuring an IP68 rating, the Bender V is cut to length and factory sealed before despatch for faultless waterproofing.

Typically mounted in a pelmet for indirect lighting, Bender V's LEDs are completely diffused, allowing it to be easily mounted where it is completely visible without glare.


Easy to install, aluminium channel is first screwed to the mounting surface, then the Bender V is firmly clipped into the channel.

As standard, power cable enters from the side, however location is customisable on request to either the side, end, or underneath.

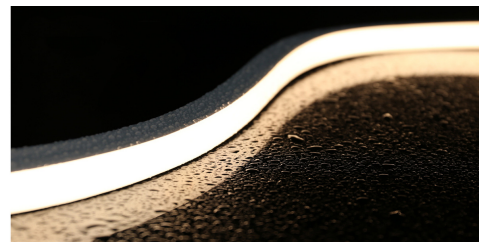

PRODUCT SPECIFICATIONS

| | |
|-----------------------------|-------------------------------|
| Wattage per Metre: | 10W |
| Lumens per Metre: | >420Lm/m |
| CCT: | 2700K / 3000K / 4000K / 5000K |
| CRI: | CRI > 80 |
| Beam Angle: | 120 Degrees Wide |
| Material: | PVC |
| IP Rating: | IP68 |
| Mounting: | Surface Mount |
| Input Voltage: | 24V DC |
| Light Source: | LED |
| Lifetime: | L70 70,000hrs |
| Min Bending Diameter | 120mm |

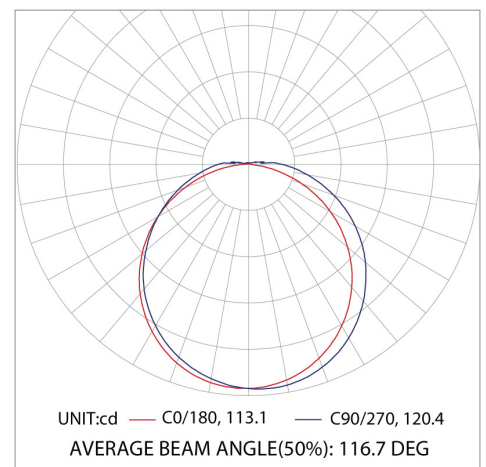


BENDER V

BENDV - VERTICALLY BENDING IP68 STRIP LIGHT

CODING MATRIX

| Family | Power | | CCT | | | Input Voltage | |
|--------------|------------|-----|------------|-------|--------|---------------|--------|
| BENDV | -10 | 10W | -2K | 2700K | ~420Lm | -24V | 24V DC |
| | | | -3K | 3000K | ~420Lm | | |
| | | | -4K | 4000K | ~480Lm | | |
| | | | -5K | 5700K | ~480Lm | | |

DIMENSIONAL DIAGRAM

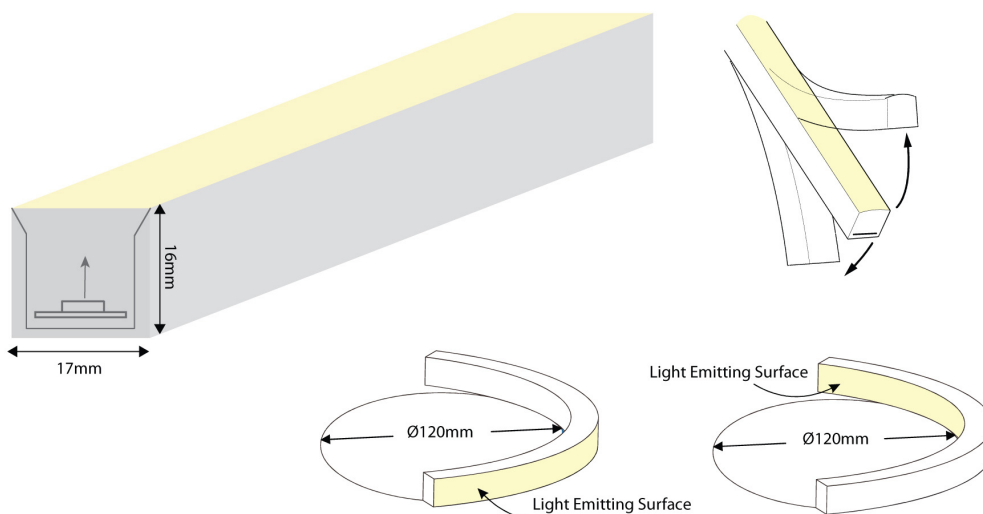

CABLE ENTRY

The cable entry can be customised to project requirements, with either side entry, back entry or end entry. This is then factory sealed prior to despatch to site.



BENDER V

BENDV - VERTICALLY BENDING IP68 STRIP LIGHT


MOUNTING ACCESSORIES

A variety of mounting clips and channels are available, to suit many applications.

BENDV-MT-DEP

BENDV-MT-SPK

BENDV-MT-FLEX

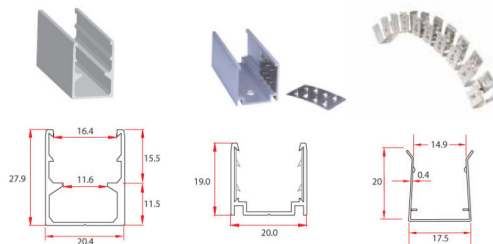

MINIMUM BENDING DIAMETER

