


BENDER

BEND - LED FLEXIBLE STRIPLIGHT

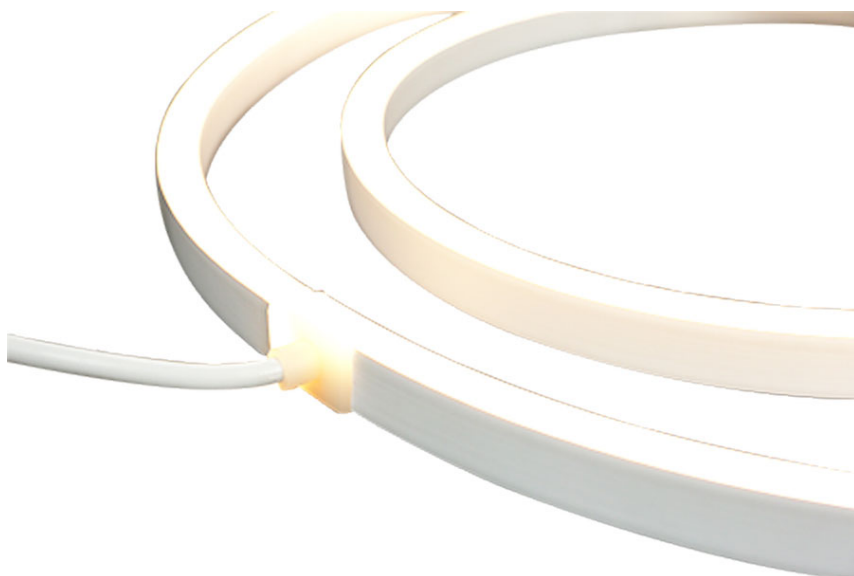

The Bender range of flexible strip lighting provides a unique opportunity to integrate creative lighting effects in your project. Featuring an IP68 rating, the Bender is cut to length and factory sealed before despatch for faultless waterproofing.

Typically mounted in a pelmet for indirect lighting, Bender's LEDs are completely diffused, allowing it to be easily mounted where it is completely visible without glare.


Easy to install, aluminium channel is first screwed to the mounting surface, then the Bender is firmly clipped into the channel.

As standard, power cable enters from the side, however location is customisable on request to either the side, end, or underneath.



PRODUCT SPECIFICATIONS

Wattage per Metre:	12W / 5W
Lumens per Metre:	380 / 150
CCT:	2000K / 3000K / 4000K / 5000K
CRI:	CRI > 80
Beam Angle (Dome):	200 Degrees Wide
Beam Angle (Flat):	120 Degrees Wide
Material:	PVC
IP Rating:	IP68
IK Rating:	IK08
Mounting:	Surface Mount
Input Voltage:	24V DC
Lifetime:	L70 70,000hrs
Min Bending Diameter	80mm

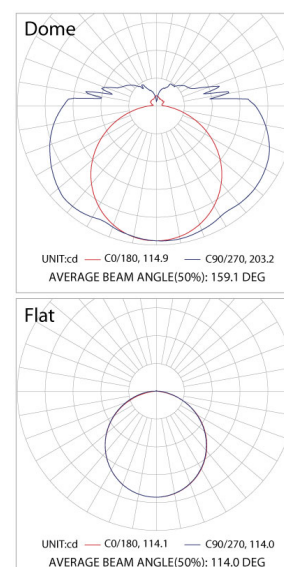

BENDER


BEND - LED FLEXIBLE STRIPLIGHT

CODE BUILDER



Family	Power		Lumens	CCT		Input Voltage		Shape	Distribution
BEND	05	5W	150 Lm/mtr	-2K	2700K	-24V	24Vdc	(Blank)	Flat
	12	12W	380 Lm/mtr	-3K	3000K				115 Degrees Sideways
				-4K	4000K			-DM	Dome
				-5K	5700K				200 Degrees Sideways

DIMENSIONAL DIAGRAM

Dome




Flat



BENDER


BEND - LED FLEXIBLE STRIPLIGHT

MINIMUM BENDING DIAMETER

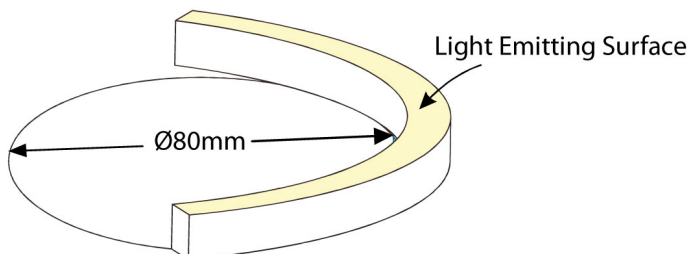


INSTALLATION INSTRUCTIONS

The Bender can be supplied with a variety of channel mounting options to suit the application.

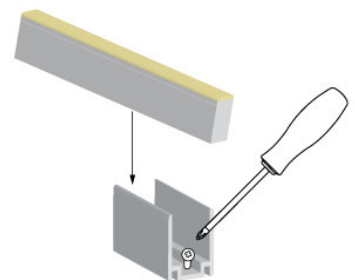

MOUNTING ACCESSORIES

A variety of mounting clips and channels are available.

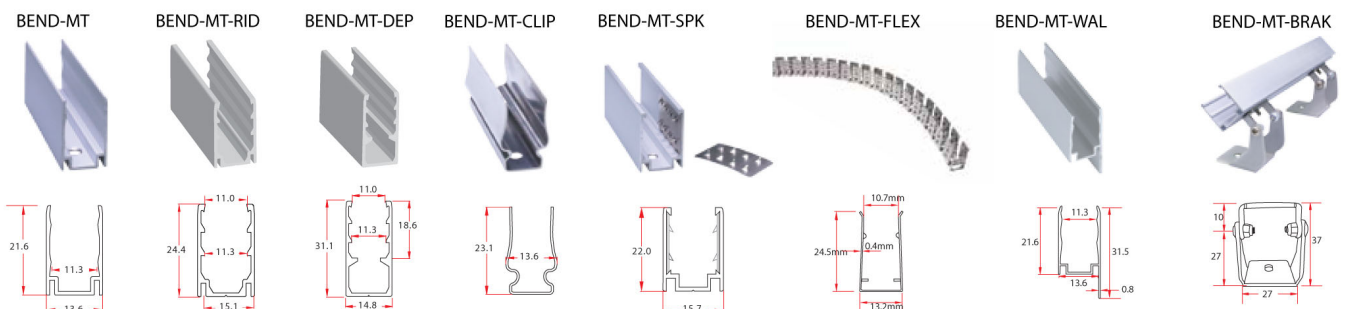

BENDER

BEND - LED FLEXIBLE STRIPLIGHT

MINIMUM BENDING DIAMETER

