

BANGLE

DL79 - SURFACE MOUNT LED DOWNLIGHT




The Bangle from Vision Lighting is a surface-mounted downlight, ideal for installation under concrete ceilings or soffits where standard recessed downlights are not feasible. Its cylindrical design ensures versatility and aesthetic appeal.

Featuring a clear, tempered glass lens over a specular aluminium reflector, the Bangle is designed to remain dust-free throughout its lifetime.

Installation is straightforward: the detachable bracket at the back allows for easy ceiling mounting, with the luminaire securely screwing onto the bracket.

PRODUCT SPECIFICATIONS

Wattage:	10W 15W 20W 25W 32W
CCT:	3000K 4000K
CRI:	Ra>90
Beam Angle:	60° 45° 24° 36°
Dimming:	DALI Available
Colour:	White Black
Mounting:	Surface Mount
IP Rating:	IP54
Lifetime:	L80B10>50,000hrs

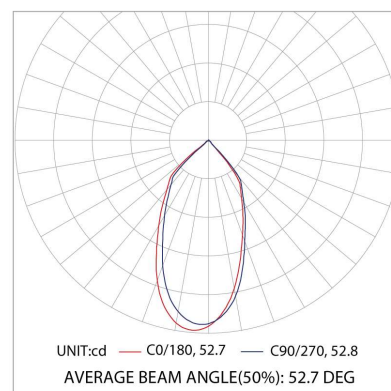

BANGLE

DL79 - SURFACE MOUNT LED DOWNLIGHT


CODING MATRIX

Family	Dimension	Power	CCT/CRI	Beam Angle	Colour	Dimming
DL79	09	90mm dia	-10W 10W	3K9 3000K CRI90	60D 60°	WT White (Blank) Non-Dimmable
	12	120mm dia	-15W 15W	4K9 4000K CRI90	45D 45°	BK Black -DA DALI
	16	160mm dia	-20W 20W		36D 36°	
			-25W 25W		24D 24°	
			-32W 32W			

Not all size, wattage and beam angle combinations are available. See table below for more information

Code	Diameter	Power	Beam Angle				Dimming	
			24D	36D	45D	60D	Non-Dim	DALI
DL79-09	90mm	10W-15W				Y	Y	N/A
DL79-12	120mm	10W-25W	Y		Y	Y	Y	Y
DL79-16	160mm	10W-32W	Y	Y	Y	Y	Y	Y


DIMENSIONAL DIAGRAM

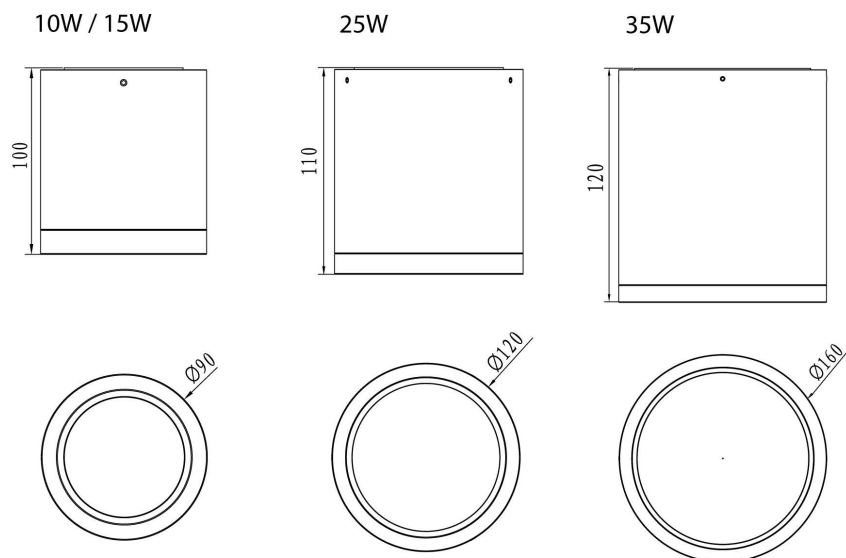

BANGLE

DL79 - SURFACE MOUNT LED DOWNLIGHT

INSTALLATION DETAILS

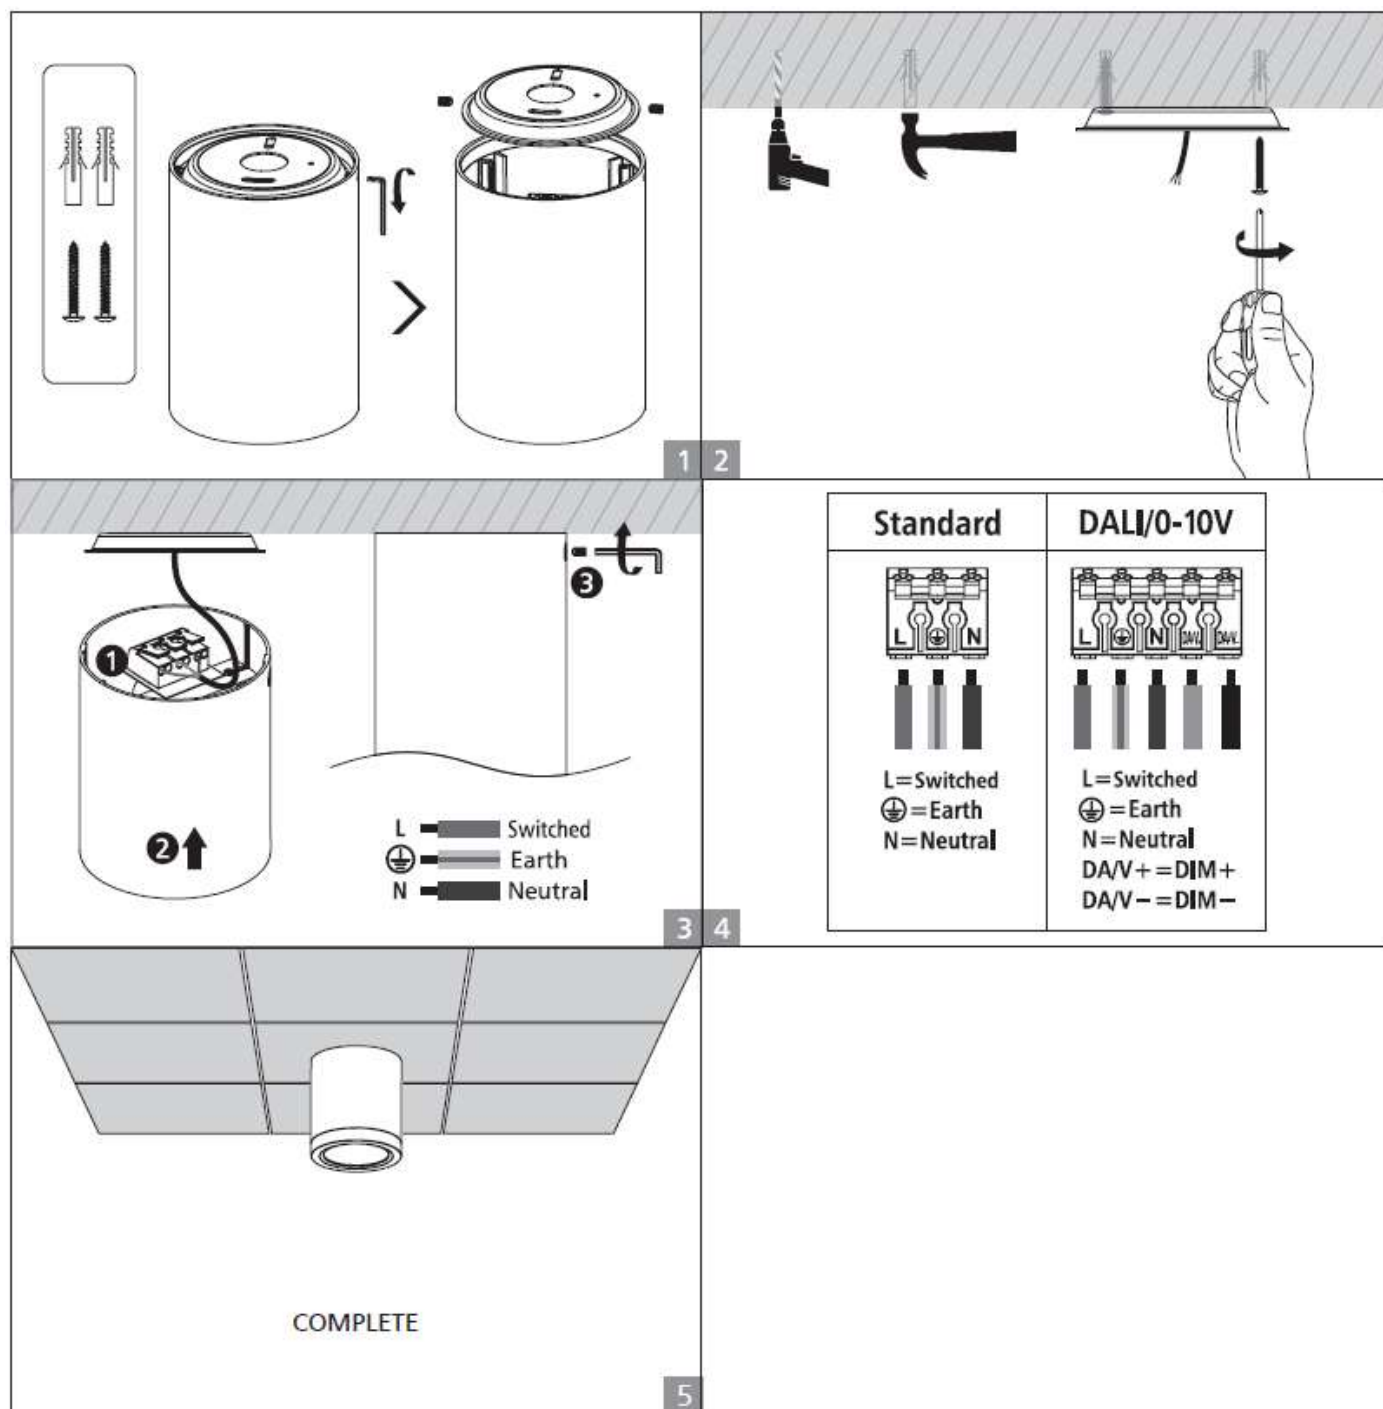

BANGLE

DL79 - SURFACE MOUNT LED DOWNLIGHT

