

ARMADILLO II

BLE30 - WEATHERPROOF LED BATTEN

Durable and Impervious



The Vision Lighting Armadillo LED range of weatherproof battens are designed for efficient illuminance of large areas including, both internal and external applications.

The ideal replacement for older T8 or T5 fluorescent technology, the Armadillo is available in various wattages and sizes that far exceed the performance of the fittings being replaced.


Incorporating a LED technology within a durable and high integrity polycarbonate housing, this is the product of choice where long life and reliability are a priority.

With options of colour temperature, dimming, motion sensor and emergency technology, this versatile range provides the flexibility required to deal with the intricacies and challenges of commercial lighting.



PRODUCT SPECIFICATIONS

Wattage:	25W / 40W / 52W
Lumens:	2200Lm ~ 5950Lm
Efficacy:	88Lm/W / 115Lm/W
CCT:	4000K Standard / 3K/5K/6K Special order
CRI:	CRI >80
Beam Angle:	120 Degrees
Dimming:	None / DALI
Material:	Polycarbonate
IP Rating:	IP65
IK Rating:	IK08
Mounting:	Surface / Chain Suspended
Lifetime:	L70 59,450 hours

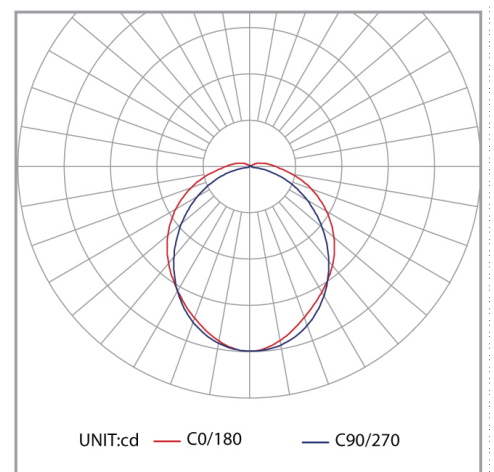


ARMADILLO II

BLE30 - WEATHERPROOF LED BATTEN

CODING MATRIX

Model	Wattage		Length	CCT		High Output		Dimming		Other options	
BLE30	25	25W	600mm	-4K	4000K	(Blank)	~88Lm/W	(Blank)	None	(Blank)	None
						-HO	~115Lm/W	-DA	DALI	-SEN	Motion Sensor
	40	40W	1200mm							-EM	Emergency backup
52	52W							Emergency for 1200mm only			

DIMENSIONAL DIAGRAM

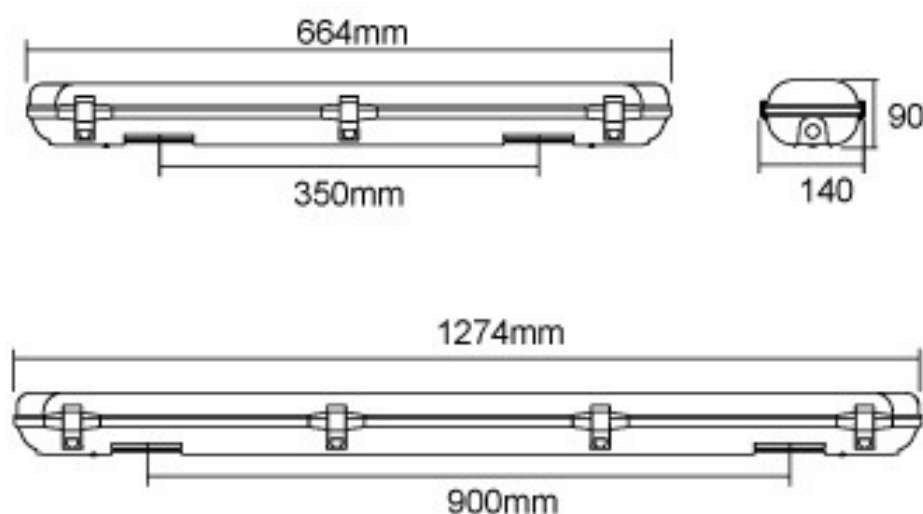

EMERGENCY OPTION

Emergency option available with AS/NZS 2293 complaint emergency battery backup. 3 hours initial duration. 90 minutes lifetime duration.



ARMADILLO II

BLE30 - WEATHERPROOF LED BATTEN

MOUNTING DETAILS

Comes complete with brackets for easy surface mounting, and A-frame clips for suspended installation.

