

ALINYA U 68

ALN-U68 - SUSPENDED DIRECT / INDIRECT LED EXTRUSION

Elegant & Bespoke



The Alinya range from Vision Lighting enriches a space with clean, unobtrusive illumination. Incorporating a unique reflector and diffuser system the Alinya U 68 provides an even light distribution and efficacy of 148Lm/W.

Quality internal componentry, ensure a calculated lifetime of L70 >150,000 hours, for peace of mind and reduced maintenance cost.


Manufactured in-house by Vision Lighting, the Alinya range is available in custom lengths and angles as required, with an expedient turnaround.

The Alinya U 68 is available complete with suspension accessories and the perfect compliment for education, hospital, and office lighting applications.



PRODUCT SPECIFICATIONS

ALN-U68	
Wattage:	10W/m - 28W/m
Efficacy:	148Lm/W
CCT:	3000K / 4000K
Dimming:	DALI available
Material:	Extruded Aluminium
Diffuser:	Opal Polycarbonate
Reflector:	Ultra-white Polycarbonate
IP Rating:	IP44
Mounting:	Suspended

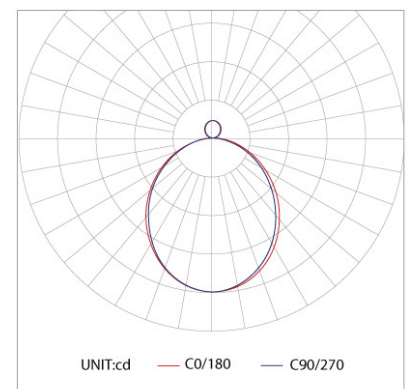


ALINYA U 68

ALN-U68 - SUSPENDED DIRECT / INDIRECT LED EXTRUSION

CODING MATRIX

Extrusion Type		CCT		Colour		Dimming		Length	
ALN-U68	Direct/ Indirect	-3K	3000K	-BK	Black Powder coat	(Blank)	Non-Dimming	(Blank)	Price per Metre
		-4K	4000K	-WT	White Powder coat	-DA	DALI	-100	1m
		-TW	Tunable White 2700-6500K	-GR	Grey Powder coat	-DT8	DALI Device Type 8 for TW	-300	3m
				-AN	Anodised			-500	5m
								-1000	10m etc.

DIMENSIONAL DIAGRAM

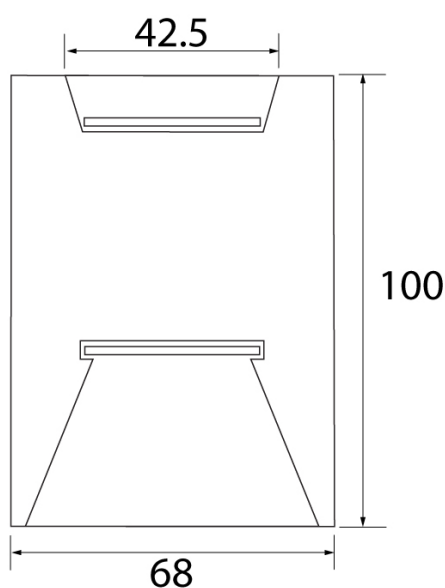

LENGTH INCREMENTS

The LED PCB boards come in length increments of 560mm, 140mm, and 70mm. This ensures we can manufacture to exact lengths.

Coupled with a best-in-class reflector and diffuser combination, any potential for shadowing on the diffuser is eliminated.



ALINYA U 68

ALN-U68 - SUSPENDED DIRECT / INDIRECT LED EXTRUSION

ALINYA 68 SERIES PHOTOMETRIC DATA

Alinya series products can be manufactured specifically to any lumen output as required to meet project specifications.

This table shows performance characteristics for a typical low output and high output configuration.

Alinya 68 Series 4000K Ra>80					
Electrical & Photometric					
If (Forward Current)	280mA	350mA	420mA	480mA	550mA
Lumen/m	1749Lm/m	2171Lm/m	2597Lm/m	2949Lm/m	3499Lm/m
Power/m	11.4W	14.3W	17.2W	19.8W	23.7W
Efficacy	153Lm/W	152Lm/W	151Lm/W	149Lm/W	148Lm/W
Max Linkable Length	5600mm	4620mm	3780mm	3360mm	2800mm
TM-21 Calculations					
L70B50 Calculated			254,800		
L70B50 Reported			>72,000		
L70B10 Calculated			126,000		
L70B10 Reported			>72,000		
L90B50 Calculated			80,200		
L90B50 Reported			>72,000		

OPTIONAL ACCESSORIES

Alinya extrusion is available with both emergency spitfires and sensors in-built. Spitfires compliant to AS2293. Either DALI or mains switching sensors are available.



SUSPENSION BRACKET

Each project provides different obstacles and restrictions, including limitations on where suspension points can be located in the ceiling.

With improved mounting flexibility, the Alinya U series incorporates a suspension bracket which can be mounted anywhere along the length of the fitting, providing the versatility to meet challenging project mounting requirements.

