

# ALINYA2 F68

## AL2-F68 - SURFACE MOUNT LINEAR LUMINIAIRE

### *Superior Optical Control*



The Alinya2 range from Vision Lighting enriches a space with low glare, uniform illumination. Incorporating a superior optical lens system, the Alinya2 is perfect for open plan offices and learning areas.


Quality internal componentry ensure a long service life and durability, for peace of mind and reduced maintenance cost. Alinya F68 is supplied complete with surface mounting brackets for easy installation.

Manufactured in-house by Vision Lighting, the Alinya range is available in custom lengths as required, with an expedient turnaround.



### PRODUCT SPECIFICATIONS

<b>Wattage:</b>	10W/m - 28W/m
<b>Efficacy:</b>	150lm/W
<b>CCT:</b>	3000K / 4000K
<b>CRI:</b>	Ra>80
<b>Beam Angle:</b>	Batwing 110° / Batwing 90° / Other on request
<b>Dimming:</b>	On/Off / DALI
<b>Material:</b>	Extruded Aluminium
<b>Lens:</b>	PMMA
<b>Colour:</b>	Black / White / Grey / Other on request
<b>IP Rating:</b>	IP20
<b>Mounting:</b>	Surface Mount

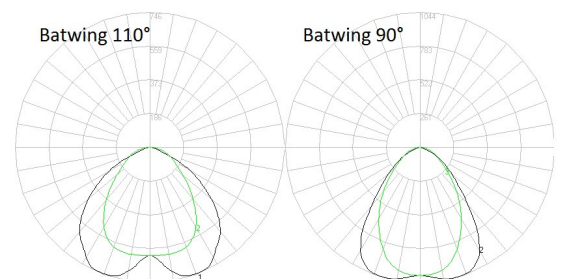

# ALINYA2 F68

## AL2-F68 - SURFACE MOUNT LINEAR LUMINIARE

### CODING MATRIX

Extrusion Type		Distribution		CCT		Colour		Dimming	
AL2-F68	Surface Mount	-B110	Batwing 110°	-3K	3000K	-BK	Black Powder coat	(Blank)	Non-Dimming
		-B90	Batwing 90°	-4K	4000K	-WT	White Powder coat	-DA	DALI
						-GR	Grey Powder coat		
						-AN	Anodised		

### DIMENSIONAL DIAGRAM

