

ALINYA2

AL2-T68 - T-BAR MOUNT LED EXTRUSION

Superior Optical Control




The Alinya2 range from Vision Lighting enriches a space with low glare, uniform illumination. Incorporating a superior optical lens system, the Alinya2 is perfect for open plan offices and learning areas.

Quality internal componentry ensure a long service life and durability, for peace of mind and reduced maintenance cost. Alinya T68 is supplied complete with T-Bar brackets for easy installation.

Manufactured in-house by Vision Lighting, the Alinya range is available in custom lengths as required, with an expedient turnaround.

PRODUCT SPECIFICATIONS

Wattage:	10W/m - 28W/m
Efficacy:	150lm/W
CCT:	3000K / 4000K
CRI:	Ra>80
Beam Angle:	Batwing 110° / Batwing 90° / Other on request
Dimming:	On/Off/ Dali
Material:	Extruded Aluminium
Lens:	PMMA
Colour:	Black / White / Grey / Other on request
IP Rating:	IP20
Mounting:	T-Bar

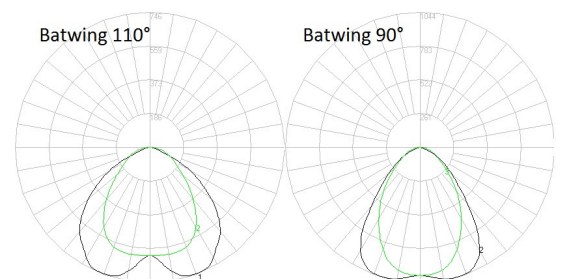

ALINYA2

AL2-T68 - T-BAR MOUNT LED EXTRUSION

CODING MATRIX

Extrusion Type	Distribution	CCT	Colour	Dimming
AL2-T68 T-Bar	-B110 Batwing 110°	-3K 3000K	-BK Black Powder coat	(Blank) Non-Dimming
	-B90 Batwing 90°	-4K 4000K	-WT White Powder coat	-DA DALI
			-GR Grey Powder coat	
			-AN Anodised	

DIMENSIONAL DIAGRAM

