

ALINYA2 U68

AL2-U68 - SUSPENDED UP/DOWN LED EXTRUSION

Elegant & Bespoke



The Alinya2 range from Vision Lighting enriches a space with clean, unobtrusive illumination. Incorporating a unique reflector and diffuser system the Alinya2 U68 provides an even light distribution and efficacy of 148Lm/W.

Quality internal componentry, ensure a calculated lifetime of L70 >150,000 hours, for peace of mind and reduced maintenance cost.


Manufactured in-house by Vision Lighting, the Alinya2 range is available in custom lengths and angles as required, with an expedient turnaround.

The Alinya2 U 68 is available complete with suspension accessories and the perfect compliment for education, hospital, and office lighting applications.



PRODUCT SPECIFICATIONS

Wattage:	10W/m - 28W/m
Efficacy:	148Lm/W
CCT:	3000K 4000K
CRI:	>80
Beam Angle:	Batwing 110° Batwing 90°
Dimming:	DALI available
Material:	Extruded Aluminium
Colour:	Black White Grey Other on request
Diffuser:	Opal Polycarbonate
Reflector:	Ultra-white Polycarbonate
IP Rating:	IP20
Mounting:	Suspended
Lifetime:	L70 >150,000 hrs

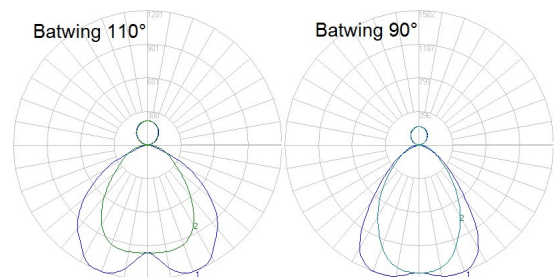


ALINYA2 U68

AL2-U68 - SUSPENDED UP/DOWN LED EXTRUSION

CODING MATRIX

Extrusion Type		Distribution		CCT		Colour		Dimming	
AL2-U68	Suspended	-B110	Batwing 110°	-3K	3000K	-BK	Black Powder coat	(Blank)	Non-Dimming
		-B90	Batwing 90°	-4K	4000K	-WT	White Powder coat	-DA	DALI
						-GR	Grey Powder coat		
						-AN	Anodised		

DIMENSIONAL DIAGRAM

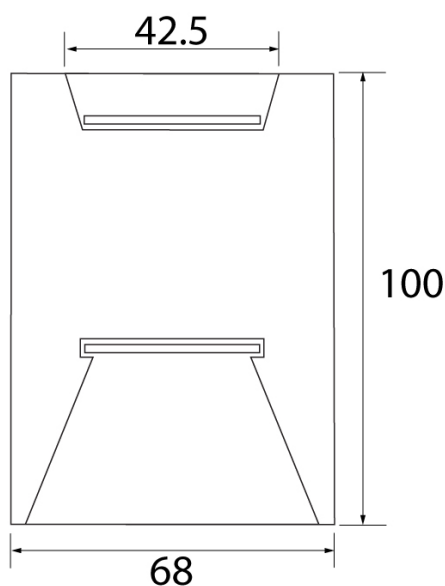

SUSPENSION BRACKET

Each project provides different obstacles and restrictions, including limitations on where suspension points can be located in the ceiling.

With improved mounting flexibility, the Alinya U series incorporates a suspension bracket which can be mounted anywhere along the length of the fitting, providing the versatility to meet challenging project mounting requirements.

