


DARKLINE S68

ALD-S68 - LOW GLARE LINEAR EXTRUSION

Glare Free Illumination



The DarkLine series from Alinya is the ideal linear product for glare free illumination and visual comfort.


The light distribution is balanced between being wide enough to achieve uniformity; and having a sharp enough cut-off to easily allow $UGR < 16$ in designs.

The DarkLine LED modules can be configured to suit any project: in continuous runs; with blanking plates in between; or with low output diffused light in between.

Complete with suspension mounting accessories for easily installation

PRODUCT SPECIFICATIONS

| | |
|--------------------------|-----------------------------------|
| Lumens: | 1200 - 3000Lm |
| Efficacy: | up to 117Lm/W |
| CCT: | 3000K 4000K Tunable |
| CRI: | Ra>80 Ra>90 |
| Beam Angle: | 50° 80° |
| Dimming: | DALI Casambi |
| Housing Material: | Aluminium Extrusion |
| Housing Colour: | Black White Silver Anodised |
| Diffuser: | Frosted PMMA Lens |
| Reflector: | PC ABS Shade |
| Reflector Colour: | Black White 'Metal' |
| IP Rating: | IP20 |
| Mounting: | Suspended |

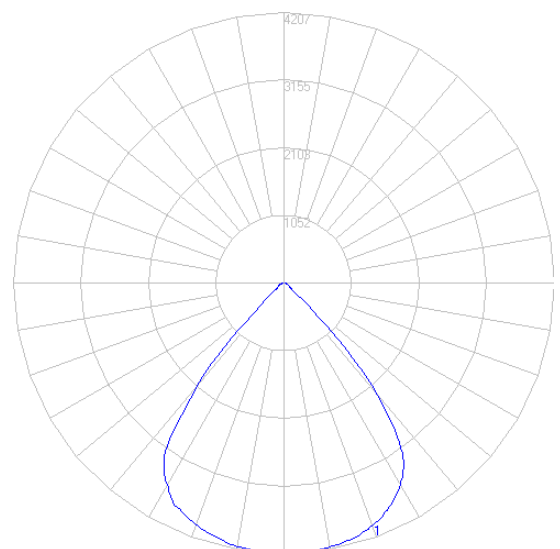

DARKLINE S68

ALD-S68 - LOW GLARE LINEAR EXTRUSION

CODING MATRIX

| Family | Beam Angle | CCT | Housing Colour | Reflector Colour | Dimming |
|----------------------------------|-------------------|-------------------|---------------------|------------------|---------------------|
| ALD-F68 Surface | -50D ~ 50° | <i>CRI 80:</i> | -BK Black | BK Black | (Blank) None |
| ALD-S68 Suspended | -80D ~ 80° | -3K 3000K | -WT White | WT White | -DA DALI |
| ALD-R68 Recessed | | -4K 4000K | -GR Grey | MT Metal | -CA Casambi |
| ALD-T68 Tbar recessed | | <i>CRI 90:</i> | -AN Anodised | | |
| ALD-U68 Suspended Up/Down | | -3K9 3000K | | | |
| | | -4K9 4000K | | | |

DIMENSIONAL DIAGRAM

