

# ALINYA R68

## ALN-R68 - PLASTER RECESSED LED EXTRUSION

### *Elegant & Bespoke*



The Alinya range from Vision Lighting enriches a space with clean, unobtrusive illumination. Incorporating a unique reflector and diffuser system the Alinya R68 provides an even light distribution and efficacy of 148Lm/W.

Quality internal componentry, ensure a high lifetime for peace of mind and reduced maintenance cost.


Manufactured in-house by Vision Lighting, the Alinya range is available in custom lengths and angles as required, with an expedient turnaround.

Available complete with outer flange and brackets to mount in a plaster cutout, the Alinya R68 is easily installed by simply removing the clip in diffuser to access the bracket-tightening screws.



### PRODUCT SPECIFICATIONS

|                    |                          |
|--------------------|--------------------------|
| <b>Power/m:</b>    | 10W/m - 32W/m            |
| <b>Lumen/m:</b>    | 958 - 4091Lm             |
| <b>CCT:</b>        | 3000K   4000K            |
| <b>Dimming:</b>    | DALI available           |
| <b>CRI:</b>        | Ra>80   Ra>90   Cyanosis |
| <b>Dimming:</b>    | DALI Available           |
| <b>Material:</b>   | Extruded Aluminium       |
| <b>Diffuser:</b>   | Opal Polycarbonate       |
| <b>Beam Angle:</b> | 120 Degrees              |
| <b>IP Rating:</b>  | IP44                     |
| <b>Mounting:</b>   | Plaster Recessed         |
| <b>Colour:</b>     | White   Black            |

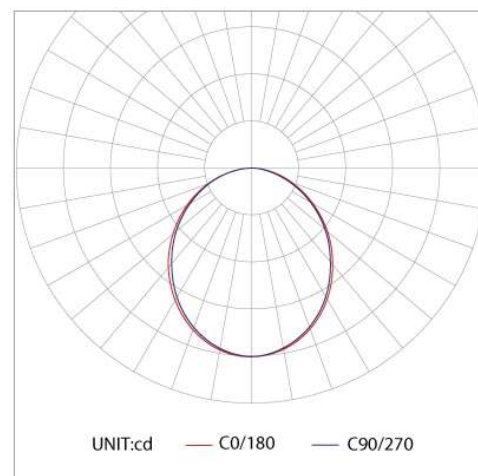

# ALINYA R68


## ALN-R68 - PLASTER RECESSED LED EXTRUSION

### CODING MATRIX

| Family             |               | Power | Lm (3K9) | Lm (4K9) | CCT/CRI |             | Colour |       | Dimming |              |
|--------------------|---------------|-------|----------|----------|---------|-------------|--------|-------|---------|--------------|
| ALN-S68            | Suspended     | -10W  | 1076     | 1207     | 3K9     | 3000K CRI90 | WT     | White | (Blank) | Non-Dimmable |
| ALN-F68            | Surface mount | -15W  | 1646     | 1846     | 4K9     | 4000K CRI90 | BK     | Black | -DA     | DALI         |
| ALN-R68            | Recessed      | -20W  | 2084     | 2338     |         |             |        |       |         |              |
|                    |               | -25W  | 2507     | 2813     |         |             |        |       |         |              |
|                    |               | -30W  | 3025     | 3436     |         |             |        |       |         |              |
| (Lumens per metre) |               |       |          |          |         |             |        |       |         |              |

(Lumens per metre)

### DIMENSIONAL DIAGRAM

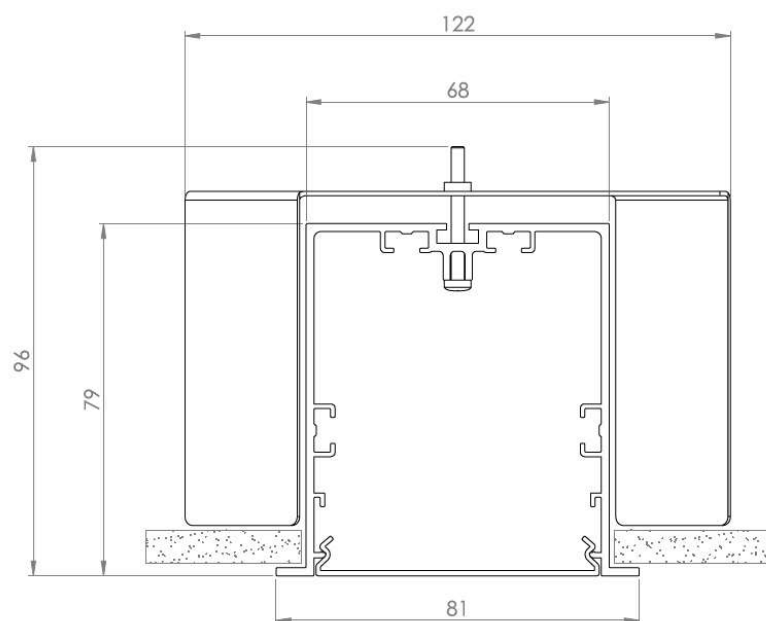

# ALINYA R68

## ALN-R68 - PLASTER RECESSED LED EXTRUSION

---

