

ALINYA T 68

ALN-T68 - TBAR RECESSED LED EXTRUSION

Elegant & Bespoke



The Alinya range from Vision Lighting enriches a space with clean, unobtrusive illumination. Incorporating a unique reflector and diffuser system the Alinya T 68 provides an even light distribution and efficacy of 148Lm/W.


Quality internal componentry, ensure a calculated lifetime of L70 >150,000 hours, for peace of mind and reduced maintenance cost.

Manufactured in-house by Vision Lighting, the Alinya range is available in custom lengths and angles as required, with an expedient turnaround.

Specifically designed to drop into a long narrow section of a grid ceiling, the Alinya T 68 provides the perfect lighting solution for open plan offices.

PRODUCT SPECIFICATIONS

ALN-T68	
Wattage:	10W/m - 28W/m
Efficacy:	148Lm/W
CCT:	3000K / 4000K
Dimming:	DALI available
Material:	Extruded Aluminium
Diffuser:	Opal Polycarbonate
Reflector:	Ultra-white Polycarbonate
IP Rating:	IP44
Mounting:	T-Bar Channel
Lifetime:	L70 >150,000hrs

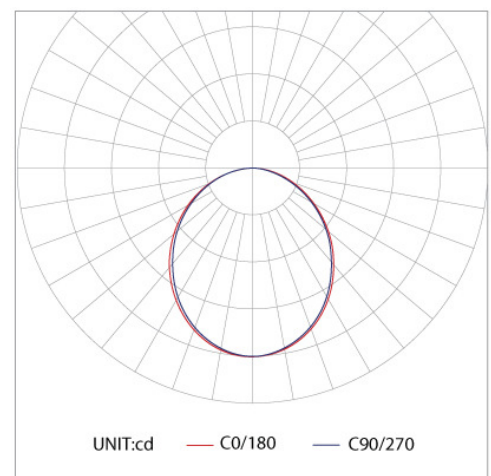


ALINYA T 68

ALN-T68 - TBAR RECESSED LED EXTRUSION

CODING MATRIX

Extrusion Type		CCT		Colour		Dimming		Length	
ALN-T68	T-bar Recessed	-3K	3000K	-BK	Black Powder coat	(Blank)	Non-Dimming	(Blank)	Price per Metre
		-4K	4000K	-WT	White Powder coat	-DA	DALI	-100	1m
				-GR	Grey Powder coat			-300	3m
				-AN	Anodised			-500	5m
		-TW	Tunable White 2700-6500K			-DT8	DALI Device Type 8 for TW	-1000	10m etc.


DIMENSIONAL DIAGRAM

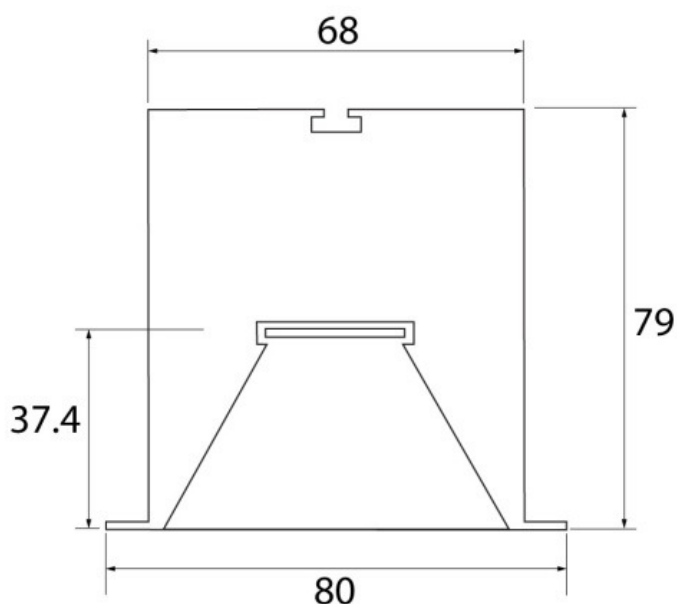

TUNABLE WHITE

The Alinya tunable white option allows CCT variation from 2700K - 6500K. Quality Lumiled chips are used in all of our boards.

Osram tunable drivers are controlled using DALI device type 8, for complete colour control using a single DALI address per driver.

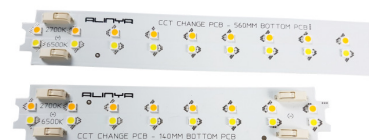

ALINYA T 68

ALN-T68 - TBAR RECESSED LED EXTRUSION

LENGTH INCREMENTS

The LED PCB boards come in length increments of 560mm, 140mm, and 70mm. This ensures we can manufacture to exact lengths.

Coupled with a best-in-class reflector and diffuser combination, any potential for shadowing on the diffuser is eliminated.



ALINYA 68 SERIES PHOTOMETRIC DATA

Alinya series products can be manufactured specifically to any lumen output as required to meet project specifications.

This table shows performance characteristics for a typical low output and high output configuration.

Alinya 68 Series 4000K Ra>80					
Electrical & Photometric					
If (Forward Current)	280mA	350mA	420mA	480mA	550mA
Lumen/m	1749Lm/m	2171Lm/m	2597Lm/m	2949Lm/m	3499Lm/m
Power/m	11.4W	14.3W	17.2W	19.8W	23.7W
Efficacy	153Lm/W	152Lm/W	151Lm/W	149Lm/W	148Lm/W
Max Linkable Length	5600mm	4620mm	3780mm	3360mm	2800mm
TM-21 Calculations					
L70B50 Calculated			254,800		
L70B50 Reported			>72,000		
L70B10 Calculated			126,000		
L70B10 Reported			>72,000		
L90B50 Calculated			80,200		
L90B50 Reported			>72,000		

OPTIONAL ACCESSORIES

Alinya extrusion is available with both emergency spitfires and sensors in-built. Spitfires compliant to AS2293. Either DALI or mains switching sensors are available.



ALINYA T 68

ALN-T68 - TBAR RECESSED LED EXTRUSION

