

FREEDOM SINGLE

WXP80S - SINGLE DIRECTION EXTERNAL PILLAR LIGHT




The Freedom wall mounted pillar light has a simple, minimalist design, which looks great on any style of building. It blends in seamlessly with both modern and heritage styles, without compromising quality or durability.

Constructed from both cast and extruded aluminium segments. Semi-matte aluminium reflector. Quality gasket and silicone seal to achieve IP65 ingress protection.

PRODUCT SPECIFICATIONS

| | |
|--------------------|-----------------------|
| Wattage: | 15W |
| Lumens: | ~1200Lm |
| CCT: | 3000K 4000K |
| CRI: | Ra>90 |
| Beam Angle: | 15° 24° 36° 50° |
| Material: | Aluminium |
| Reflector: | Aluminium |
| Colour: | Black White |
| IP Rating: | IP65 |
| IK Rating: | IK06 |
| Mounting: | Surface (Wall) |
| Lifetime: | L80B10>60,000hrs |

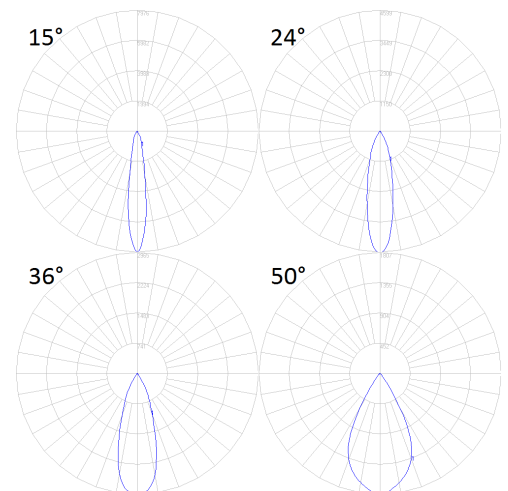


FREEDOM SINGLE

WXP80S - SINGLE DIRECTION EXTERNAL PILLAR LIGHT

CODING MATRIX

| Family | Power | | | CCT | | Trim Colour | | Beam angle | |
|--|------------|-----|--------|------------|-------|-------------|-------|-------------|-----|
| WXP80S <i>Single Direction</i> | -15 | 15W | 1200Lm | -3K | 3000K | -BK | Black | -15D | 15° |
| | | | | -4K | 4000K | -WT | White | -24D | 24° |
| | | | | | | | | -36D | 36° |
| | | | | | | | | -50D | 50° |

DIMENSIONAL DIAGRAM

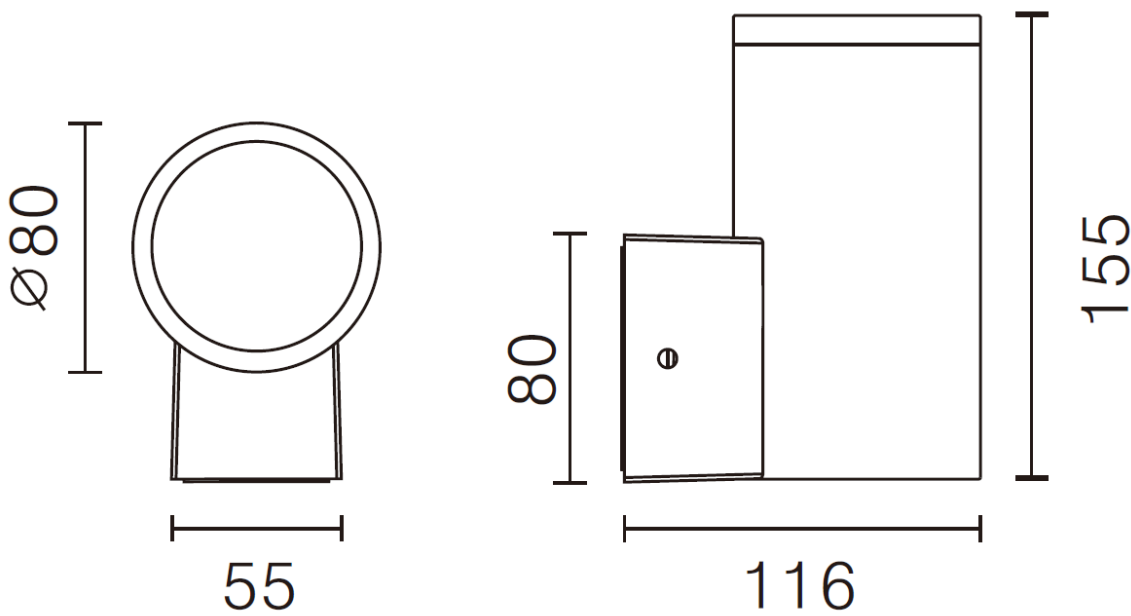

FREEDOM SINGLE

WXP80S - SINGLE DIRECTION EXTERNAL PILLAR LIGHT

INSTALLATION GUIDE

WXP80S

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced

wrench, gasket

FIG-1

FIG-2-A Concrete

Note: Please keep the cable outlet in the same vertical direction with the inlet to luminaries

Note: In order to reach the required IP, the input cable for the luminaries must be H05RN-F 3G1.0mm², and threading through before stripping.

FIG-2-B Wood board

Please make sure the thickness of the wood board no less than 5mm

FIG-3

After screwing backplate to wall cover screw heads with silicon sealer.

0.5-2.5mm² with release facility

blue/brown green/yellow

FIG-4

FIG-5