

MYA

OLE44 - SURFACE MOUNTED LED



Offering visual comfort through even diffused light, the Mya from Vision Lighting presents as a classy and efficient luminaire.


Constructed from an cylindrical aluminium body, the Mya is finished with a durable powder coat finish and PMMA diffuser. Incorporating quality Samsung LED componentry, the Mya features a long working life with high efficiency for energy savings.

Available in a range of size options; including Ø360mm, Ø480mm and Ø600mm to suit project requirements, the Mya is the perfect complement to office, education, library and hallway lighting applications.



PRODUCT SPECIFICATIONS

Wattage:	24W / 30W / 42W
Lumens:	2000Lm / 2800Lm / 4000Lm
Efficacy:	>83Lm/W
CCT:	3000K / 4000K
CRI:	>80
Beam Angle:	100°
Dimming:	DALI
Material:	Aluminium
Diffuser:	PMMA
Colour:	White / Silver / Black
IP Rating:	IP20
Mounting:	Surface
Light Source:	Samsung LED

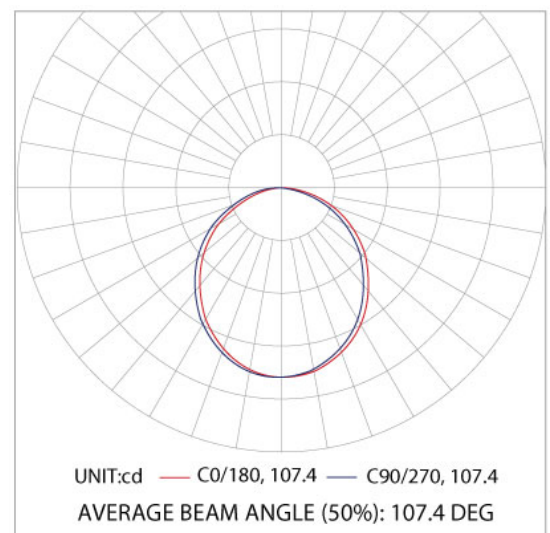

MYA

OLE44 - SURFACE MOUNTED LED

CODING METHODOLOGY

Family	Power	Lumens	Size	CCT	Trim Colour	Dimming
OLE44	-24-360	24W	2000Lm	Ø360mm	-3K 3000K	-WT White
	-30-480	30W	2800Lm	Ø480mm	-4K 4000K	-SV Silver
	-42-600	42W	4000Lm	Ø600mm		-BK Black
						(Blank) Non Dimming
						-DA DALI

DIMENSIONAL DIAGRAM

