

EXS-BOX


Exodus™ Boxster

ONE BOX SOLUTION

MAINTAINED LED WIDE BASE EXIT LIGHT

This LED Exit Light is presented in a traditional rectangular profile with a large 'PushConnect' mounting base to give installers the ultimate in simplicity, flexibility and versatility.

The wide base allows installers to easily run conduit, hide access cable and conceal existing defects on a previous installation, thus reducing unforeseen and undesirable site-related challenges. Suitable for offices, warehouses, schools, factories and public buildings.




Technical Specifications

Item	Part Number	EXS-BOXW	EXS-BOXC
	Description	LED One Box Solution Wall Mounted Wide Base Exit Light c/w Synthium™ Battery	LED One Box Solution Ceiling Mounted Wide Base Exit Light c/w Synthium™ Battery
Input	Voltage & Frequency	230VAC ; 50Hz	
	Installation	Large terminal block and 20mm ² cable entry, PushConnect mechanism	
Output	Light Source	High performance LED bar, 100,000 hours	
	Mode of Operation	Maintained / Non-Maintained / Switchable	
	Power Consumption	2W (standby)	
	Emergency Duration	> 120 minutes	
Controls	Charger	Intelligent 3-stage charger with Synthium™ battery management system	
	Protection	Overcharge, low voltage disconnect, overcurrent, short circuit	
	Testing Facility	Manual test switch	
	Indicators	Battery charger green LED	
Physical	Diffuser	All variations of Running Man pictogram	
	Construction	Flame-retardant polycarbonate	
	Mounting	Surface mounted - wall	Surface mounted - ceiling
	Dimensions L x W x H	380mm x 160mm x 90mm	380mm x 160mm x 215mm
	IP Rating	IP 20	
	Weight	1.2kg	
Environment	Operating Temperature	1° to 40°C	
	Relative Humidity	0 to 95%	
Compliance	Standards	RCM / EMC, AS/NZS 2293, AS/NZS 60598.1	
	AS/NZS 2293 Classification	C0 D8 C90 D5	C0 D10 C90 D8
Accessories	Replacement Battery	P/N: BAT-BOX: Synthium™ LiFePO ₄	


NOTE: Product specifications subject to change without prior notice due to ongoing product improvement policy and changes to industry standards.

Dimensions

EXS-BOXW (Wall Mounted):

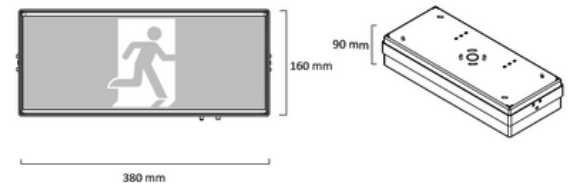

EXS-BOXC (Ceiling Mounted):

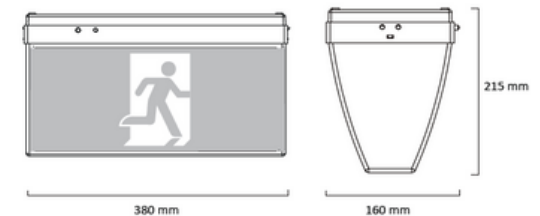

Spacing Table

This product performs the dual role as an 24m Exit Sign and an Emergency luminaire with the following NATA-accredited emergency classifications:

SPACING TABLE		MOUNTING HEIGHT (m)			
NATA Classification		2.1	2.4	2.7	3.0*
EXS-BOXW	C0 - D8	9.4	9.7	9.9	10.1
	C90 - D5	7.8	8.0	8.1	8.2
EXS-BOXC	C0 - D10	10.2	10.5	10.8	11.0
	C90 - D8	9.4	9.7	9.9	10.1

* Maximum mounting height allowed is 2.7m but for exceptions see AS2293.1 2018.



SYNTHIUM™ nanotechnology is an advanced environmentally sustainable energy development that offers extended battery life, low cost of ownership, enhanced performance and improved safety.



Vision Lighting Supplies Pty Ltd
10 Pinnacle Pl, Somersby NSW 2250

Vision retains the right to update this data at any time.

P 1300 474 878
E sales@visionlighting.net
W www.visionlighting.net