

OSPREY Y

FLE9Y - LED POLETOP - Y SHAPED




The Osprey poletop luminaire from Vision Lighting provides a functional and sleek option for most area lighting applications.

Built to withstand the elements, the Osprey is constructed to IP66 and IK08 ratings.

Using quality internal LED componentry provides optimal output for a 50,000hr life. With an assembled height of 4-9 m, the Osprey is perfectly suited to a variety of carpark, street and area lighting applications

PRODUCT SPECIFICATIONS

Wattage:	30W - 75W
Efficacy:	~125Lm/W
CCT:	3000K 4000K
CRI:	CRI80
Beam Angle:	IESNA Types
Dimming:	DALI Available
Material:	Aluminium
Diffuser:	Glass
Colour:	Black
IP Rating:	IP66
IK Rating:	IK09
Mounting:	Pole
Lifetime:	L80B10>50,000hrs

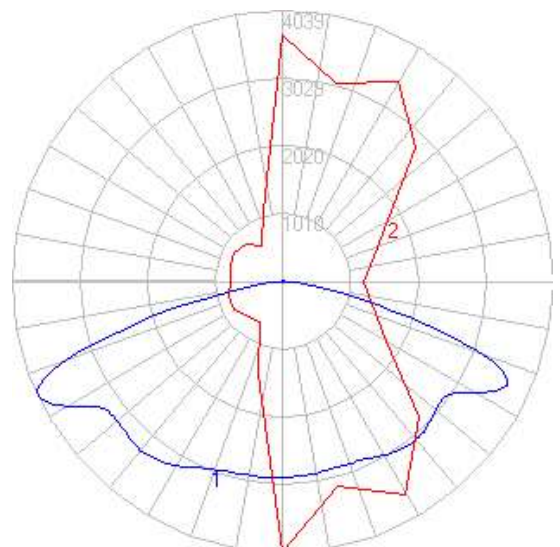

OSPREY Y

FLE9Y - LED POLETOP - Y SHAPED

CODING MATRIX

Family	Power		CCT		Trim Colour		Beam angle		Dimming	
FLE9Y	-30W	30W	-3K	3000K	-BK	Black	-T1	Type I	(Blank)	None
	-40W	40W	-4K	4000K			-T2	Type II	-DA	DALI
	-60W	60W					-T3	Type III		
	-75W	75W					-T4	Type IV		

DIMENSIONAL DIAGRAM

