

AXIS

WXFSQ - WALL PACK LUMINAIRE

Controlled illumination, contemporary form



This slimline exterior wall luminaire delivers high-efficiency output up to 130 lm/W with full cut-off optics, ensuring clean, glare-free illumination that meets dark-sky compliance requirements.

The low-profile die-cast housing complements modern façades and withstands harsh outdoor conditions. Available in bronze or silver finishes, it integrates seamlessly with a wide range of architectural styles.


Multiple wattages replace traditional 40 W–200 W HID fittings, with options for DALI or photocell to enhance energy management and control.

Ideal for perimeter lighting, entries, and pathways in commercial, educational, and civic environments—combining refined aesthetics with reliable performance for long-term value.



PRODUCT SPECIFICATIONS

Wattage:	10-70W
Lumens:	1317 - 8915Lm
CCT:	3000K 4000K
CRI:	Ra>80
Beam Angle:	IESNA Type III
Dimming:	DALI Available
Material:	Cast Aluminium
Colour:	Black White
Mounting:	Surface (Wall)
IP/IK Rating:	IP66 IK08
Lifetime:	L80B10>50,000hr

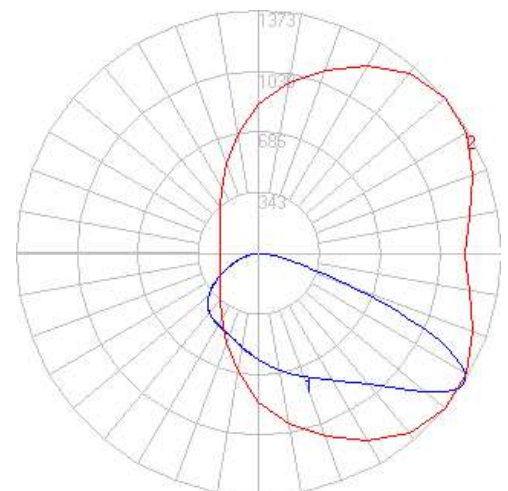

AXIS

WXFSQ - WALL PACK LUMINAIRE

CODING MATRIX

Family	Power	Dimension	CCT/CRI	Beam Angle	Colour	Dimming
WXFSQ	-10W	10W	3K 3000K CRI80	-T3	IESNA Type III	WT White
	-20W	20W				
	-30W	30W	196W x 186H x 96L (mm)			
	-40W	40W	282W x 205H x 125L (mm)			
	-70W	70W				
					BK Black	(Blank) Non-Dimmable -DA DALI

DIMENSIONAL DIAGRAM

