

# ALINYA F60

## ALN-F60 - SURFACE MOUNT LED EXTRUSION

*Elegant & Bespoke*




The Alinya range from Vision Lighting enriches a space with clean, unobtrusive illumination. Incorporating a unique reflector and diffuser system the Alinya F60 provides an even light distribution.

Quality internal componentry, ensure a high lifetime for peace of mind and reduced maintenance cost.

Designed for surface mounting, the Alinya F60 is the perfect compliment for education, hospital, and office lighting applications.

### PRODUCT SPECIFICATIONS

<b>Wattage:</b>	~18W/m
<b>Lumens:</b>	2650Lm/m
<b>CCT:</b>	3000K 4000K
<b>CRI:</b>	Ra>90
<b>Beam Angle:</b>	110°
<b>Dimming:</b>	DALI Available
<b>Material:</b>	Aluminium Extrusion
<b>Diffuser:</b>	Opal Diffused
<b>Colour:</b>	White Black
<b>Mounting:</b>	Surface Mount
<b>IP Rating:</b>	IP44
<b>Lifetime:</b>	L80B10>50,000hrs
<b>Pofile Dimensions:</b>	60(W)x80(H)

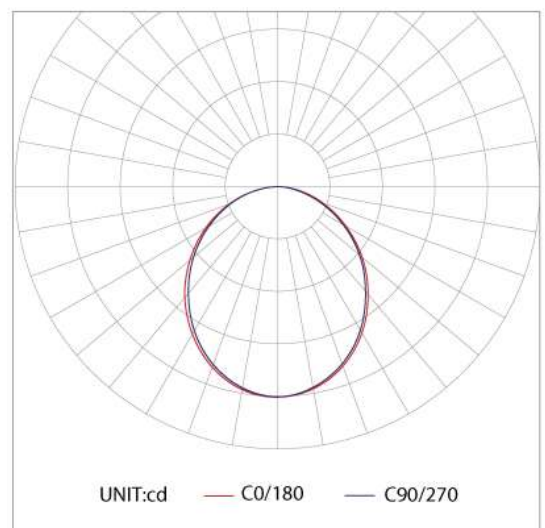

# ALINYA F60

## ALN-F60 - SURFACE MOUNT LED EXTRUSION

### CODING MATRIX

Family		Power		CCT/CRI		Colour		Dimming		Length	
ALNS60	Suspended	-18W	~18W/m	3K9	3000K	BK	Black	(Blank)	Non-Dimmable	(Blank)	per-metre
ALNF60	Surface			4K9	4000K	WT	White	DA	DALI	-1.2m	1200mm
ALNR60	Recessed									-1.5m	1500mm
										-2.4m	2400mm
										-3.0m	3000mm
										etc	

**Notes**

- Per-metre price for tender/predesign purposes only.
- Lengths available in 300 mm increments; standard lengths as listed.
- Lengths over 3.0 m will be supplied as multiple linkable sections.
- Longer single-section lengths can be supplied on a per-project basis, subject to MOQs.

### DIMENSIONAL DIAGRAM

