

ALINYA R60

ALN-R60 - PLASTER RECESSED LED EXTRUSION

Elegant & Bespoke




The Alinya range from Vision Lighting enriches a space with clean, unobtrusive illumination. Incorporating a unique reflector and diffuser system the Alinya R60 provides an even light distribution.

Quality internal componentry, ensure a high lifetime for peace of mind and reduced maintenance cost.

Designed for recessed mounting, the Alinya R60 is the perfect compliment for education, hospital, and office lighting applications.

PRODUCT SPECIFICATIONS

Wattage:	~18W/m
Lumens:	2650Lm/m
CCT:	3000K 4000K
CRI:	Ra>90
Beam Angle:	110°
Dimming:	DALI Available
Material:	Aluminium Extrusion
Diffuser:	Opal Diffused
Colour:	White Black
Mounting:	Recessed
IP Rating:	IP44
Lifetime:	L80B10>50,000hrs
Pofile Dimensions:	80(W)x71.7(H)

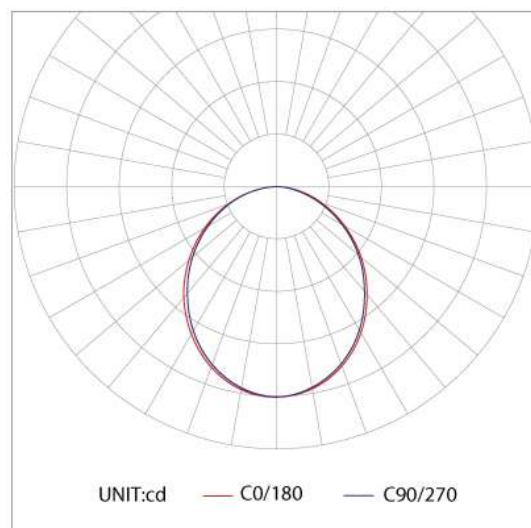

ALINYA R60

ALN-R60 - PLASTER RECESSED LED EXTRUSION


CODING MATRIX

Family	Power	CCT/CRI	Colour	Dimming	Length
ALNS60	Suspended	-18W ~18W/m	3K9 3000K	BK Black	(Blank) Non-Dimmable
ALNF60	Surface	4K9 4000K	WT White	DA DALI	-1.2m 1200mm
ALNR60	Recessed				-1.5m 1500mm
					-2.4m 2400mm
					-3.0m 3000mm
					etc

Notes

- Per-metre price for tender/predesign purposes only.
- Lengths available in 300 mm increments; standard lengths as listed.
- Lengths over 3.0 m will be supplied as multiple linkable sections.
- Longer single-section lengths can be supplied on a per-project basis, subject to MOQs.

DIMENSIONAL DIAGRAM

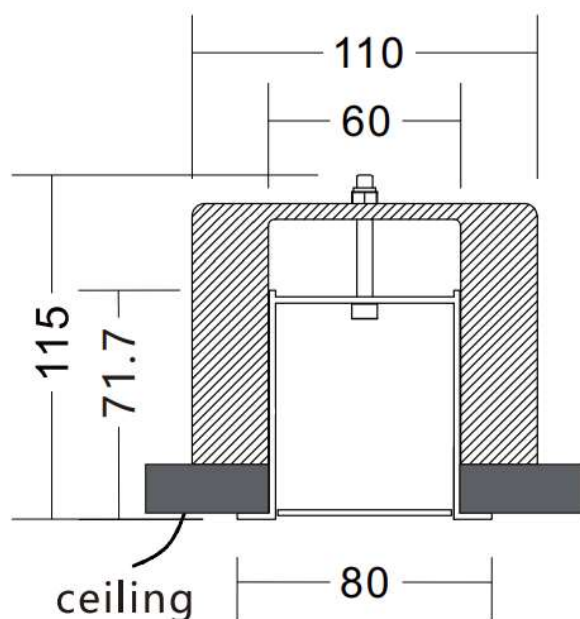

ALINYA R60

ALN-R60 - PLASTER RECESSED LED EXTRUSION

