


RINGWOOD

WXNWQ - DIRECT/INDIRECT WALL LIGHT

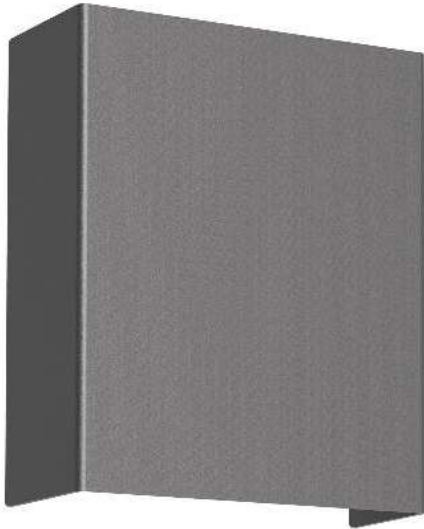

Elevate any architectural space with the Ringwood, a modern, minimalist luminaire crafted from robust aluminium.


Designed to deliver both functional and atmospheric lighting, it offers a choice of Wall Wash or 15° beam optics, providing adaptable illumination for residential, commercial, and hospitality applications.

Built to withstand the elements with an IP65 and IK08 rating and a long life of L80B10 >50,000 hours, this fitting is engineered for reliability in even the toughest environments.

Finished with a tempered glass diffuser and clean geometric styling, it blends seamlessly into both modern and classic architecture.

PRODUCT SPECIFICATIONS

Wattage:	6W 10W 2x6W 2x10W
CCT:	3000K 4000K
CRI:	Ra>80
Optic:	Wall Wash 15°
Material:	Aluminium
Diffuser:	Tempered Glass
Colour:	Dark Grey RAL7043
Mounting:	Surface (Wall)
IP Rating:	IK65
IK Rating:	IK08
Lifetime:	L80B10>50,000hrs

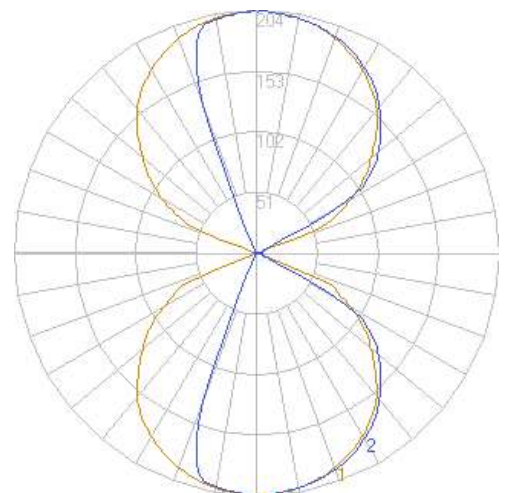


RINGWOOD

WXNWQ - DIRECT/INDIRECT WALL LIGHT

CODING MATRIX

Family	Power		Dimension: CCT/CRI	Beam Angle	Colour	
WXNWQ	-2X6W	6W Direct/Indirect	H:162 W:137 L:55	3K 3000K	(blank) Wall Wash	DG Dark Grey RAL7043
	-S-6W	6W Single		4K 4000K	-15D 15°	WT White
	-2X10W	10W Direct/Indirect	H:182 W:185 L:79			BK Black
	-S-10W	10W Single				

DIMENSIONAL DIAGRAM

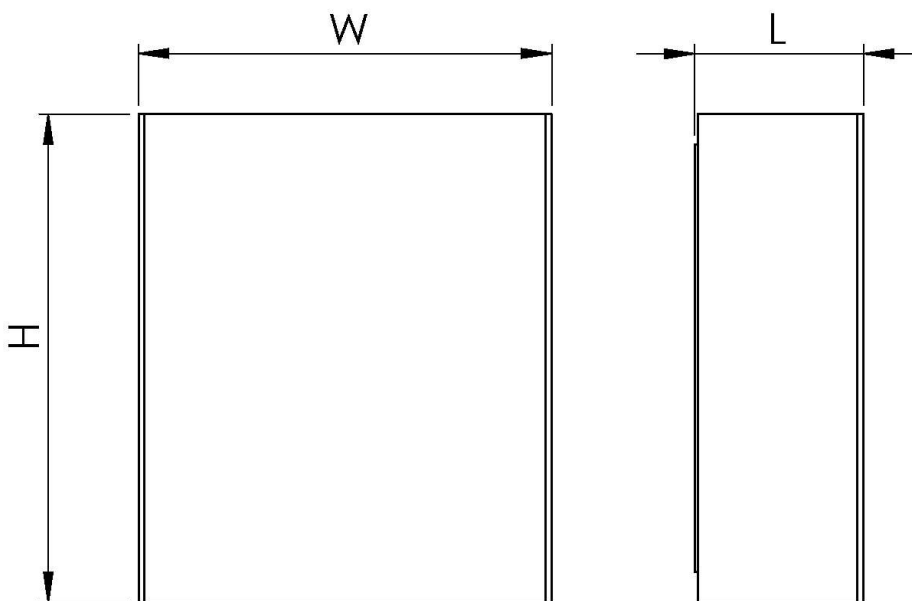

RINGWOOD

WXNWQ - DIRECT/INDIRECT WALL LIGHT

OPTIC DETAILS: STANDARD OPTION



OPTIC DETAILS: 15° OPTION

