

ALINYA F 68

ALN-F68 - SURFACE MOUNT LED EXTRUSION

Elegant & Bespoke



The Alinya range from Vision Lighting enriches a space with clean, unobtrusive illumination. Incorporating a unique reflector and diffuser system the Alinya F 68 provides an even light distribution and efficacy of 148Lm/W.

Quality internal componentry, ensure a high lifetime for peace of mind and reduced maintenance cost.


Manufactured in-house by Vision Lighting, the Alinya range is available in custom lengths and angles as required, with an expedient turnaround.

Designed for surface mounting, the Alinya F 68 is the perfect compliment for education, hospital, and office lighting applications.



PRODUCT SPECIFICATIONS

Power/m:	10W/m - 32W/m
Lumen/m:	958 - 4091Lm
CCT:	3000K 4000K
Dimming:	DALI available
CRI:	Ra>80 Ra>90 Cyanosis
Dimming:	DALI Available
Material:	Extruded Aluminium
Diffuser:	Opal Polycarbonate
Beam Angle:	120 Degrees
IP Rating:	IP44
Mounting:	Surface Mount
Colour:	White Black

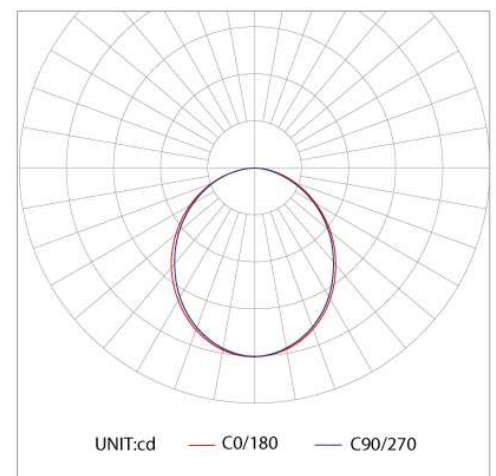

ALINYA F 68

ALN-F68 - SURFACE MOUNT LED EXTRUSION

CODING MATRIX

Family		Power	Lm (3K9)	Lm (4K9)	CCT/CRI		Colour		Dimming	
ALN-S68	Suspended	-10W	1076	1207	3K9	3000K CRI90	WT	White	(Blank)	Non-Dimmable
ALN-F68	Surface mount	-15W	1646	1846	4K9	4000K CRI90	BK	Black	-DA	DALI
ALN-R68	Recessed	-20W	2084	2338						
		-25W	2507	2813						
		-30W	3025	3436						
(Lumens per metre)										

(Lumens per metre)

DIMENSIONAL DIAGRAM

