

# ALINYA S 68

## ALN-S68 - SUSPENDED LED EXTRUSION

### *Elegant & Bespoke*



The Alinya range from Vision Lighting enriches a space with clean, unobtrusive illumination. Incorporating a unique reflector and diffuser system the Alinya S 68 provides an even light distribution and efficacy of 148Lm/W.

Quality internal componentry, ensure a high lifetime for peace of mind and reduced maintenance cost.


Manufactured in-house by Vision Lighting, the Alinya range is available in custom lengths and angles as required, with an expedient turnaround.

The Alinya S 68 is available complete with suspension accessories and the perfect compliment for education, hospital, and office lighting applications.



### PRODUCT SPECIFICATIONS

|                    |                          |
|--------------------|--------------------------|
| <b>Power/m:</b>    | 10W/m - 32W/m            |
| <b>Lumen/m:</b>    | 958 - 4091Lm             |
| <b>CCT:</b>        | 3000K   4000K            |
| <b>Dimming:</b>    | DALI available           |
| <b>CRI:</b>        | Ra>80   Ra>90   Cyanosis |
| <b>Dimming:</b>    | DALI Available           |
| <b>Material:</b>   | Extruded Aluminium       |
| <b>Diffuser:</b>   | Opal Polycarbonate       |
| <b>Beam Angle:</b> | 120 Degrees              |
| <b>IP Rating:</b>  | IP44                     |
| <b>Mounting:</b>   | Suspended                |
| <b>Colour:</b>     | White   Black            |

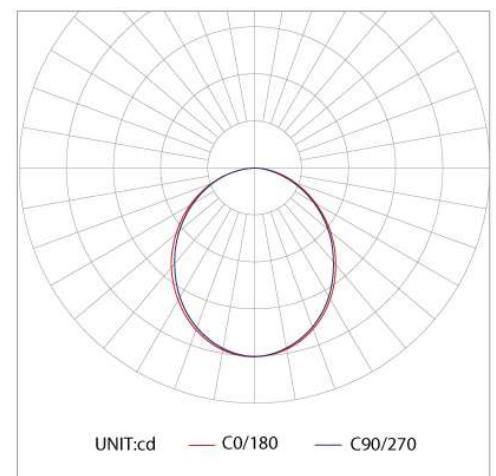

# ALINYA S 68


## ALN-S68 - SUSPENDED LED EXTRUSION

### CODING MATRIX

| Family         |               | Power       | Lm (3K9) | Lm (4K9) | CCT/CRI                | Colour          | Dimming                     |
|----------------|---------------|-------------|----------|----------|------------------------|-----------------|-----------------------------|
| <b>ALN-S68</b> | Suspended     | <b>-10W</b> | 1076     | 1207     | <b>3K9</b> 3000K CRI90 | <b>WT</b> White | <b>(Blank)</b> Non-Dimmable |
| <b>ALN-F68</b> | Surface mount | <b>-15W</b> | 1646     | 1846     | <b>4K9</b> 4000K CRI90 | <b>BK</b> Black | <b>-DA</b> DALI             |
| <b>ALN-R68</b> | Recessed      | <b>-20W</b> | 2084     | 2338     |                        |                 |                             |
|                |               | <b>-25W</b> | 2507     | 2813     |                        |                 |                             |
|                |               | <b>-30W</b> | 3025     | 3436     |                        |                 |                             |

(Lumens per metre)

### DIMENSIONAL DIAGRAM

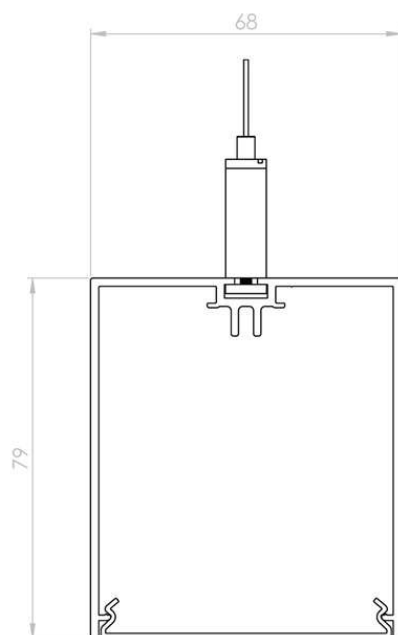

# ALINYA S 68

## ALN-S68 - SUSPENDED LED EXTRUSION

---

