

# SHIMMER

## DL08 - IP65 LED DOWNLIGHT



Made to fit in small spaces, the Shimmer downlight from Vision Lighting provides a solution for applications where installation space is limited.


Featuring a super slim and compact design, the Shimmer is constructed with a T-shaped head sink for greater heat dissipation along with a traditional diamond plated surface lens for uniformed lighting output.

The Shimmer includes an IP65 rated cover making it suitable for use in damp environments. Perfect for narrow ceiling installations, the Shimmer is an ideal solution for general lighting in office, hotel, retail and education applications.



### PRODUCT SPECIFICATIONS

<b>Wattage:</b>	5W / 8W / 10W / 13W
<b>Lumens:</b>	530Lm / 815Lm / 1000Lm / 1350Lm
<b>Efficacy:</b>	~100Lm/W
<b>CCT:</b>	3000K / 4000K
<b>CRI:</b>	Ra>80 / Ra>90
<b>Beam Angle:</b>	36° / 60°
<b>Dimming:</b>	DALI / Triac Universal Options
<b>Colour:</b>	White / Black
<b>IP Rating:</b>	IP65
<b>IK Rating:</b>	IK09
<b>Mounting:</b>	Recessed
<b>Lifetime:</b>	L90B50=50,700hrs L80B50>63,500hrs

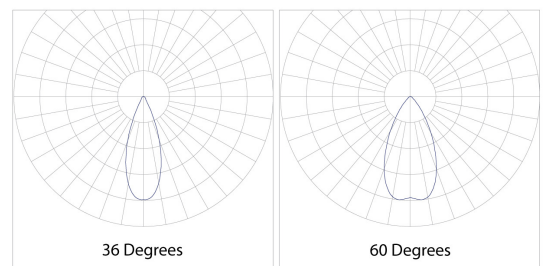

# SHIMMER



## DL08 - IP65 LED DOWNLIGHT

### CODING MATRIX









Family	Shape	Power	CCT	Beam Angle	Trim Colour	Dimming
DL08	<b>(Blank)</b> Round SQ	05 5W 480Lm	-3K 3000K	-36 36 Degrees	-WHT White	<b>(Blank)</b> Non Dimming -D Triac Universal -DA DALI
		08 8W 735Lm	-4K 4000K	-60 60 Degrees	-BLK Black	
		10 10W 870Lm				
		13 13W 1200Lm				

### DIMENSIONAL DIAGRAM

5W / 8W



10W / 13W

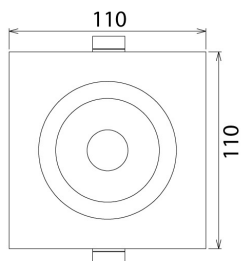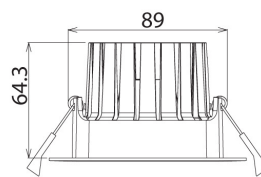

### THERMAL EFFICIENCY

To complement the quality LED componentry, the heat-sink is designed using a series of T-shaped fins to maximised the radiation surface area, and improve cooling efficiency.

