

SHEEN

PLE4 - LOW GLARE HIGH OUTPUT LED PANEL

Functional Illumination




Create expanses of uniform, low glare illumination with the Sheen range of high output panels from Vision Lighting. Compact and efficient, the Sheen provides a seamless ceiling light solution.

The Sheen comes complete with a flex and plug for easy installation, and is available in 4 mounting styles - T-bar recessed, plaster recessed, surface mounting or suspended. Note: additional mounting accessories required and quoted separately.

Available in a range of sizes, the Sheen is ideal for a variety of applications including education, hospital and office lighting.

PRODUCT SPECIFICATIONS

Wattage:	15W / 18W / 20W / 26W / 33W / 42W / 60W
Lumens:	~1275Lm - 5630Lm
Efficacy:	>85Lm/W
CCT:	3000K / 4000K
CRI:	>80
Beam Angle:	80 Degrees
Glare Rating:	<19 UGR
Dimming:	DALI
Material:	Aluminium
Diffuser:	Microprismatic
IP Rating:	IP40
Mounting:	Recessed / Surface / Suspended
Lifetime:	L70 >54,000hrs

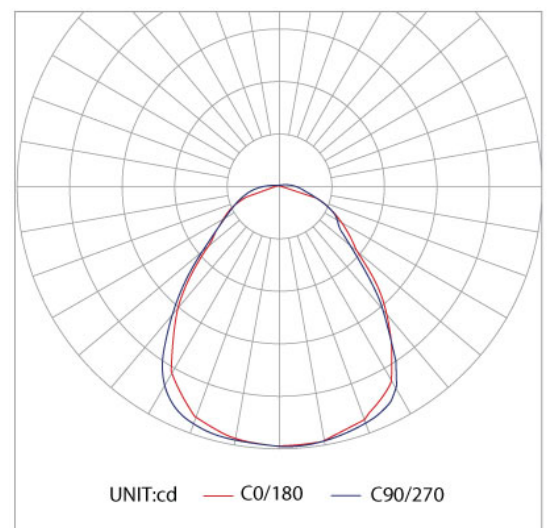

SHEEN

PLE4 - LOW GLARE HIGH OUTPUT LED PANEL

CODE BUILDER

Family	Power	Lumens	Dimensions	CCT	Dimming
PLE4-G2	-26	26W ~2470Lm	(Blank) 1200x300mm	-3K 3000K	(Blank) Non Dimming
	-33	33W ~3340Lm	-6060 600x600mm	-4K 4000K	-D Triac Universal
	-42	42W ~3970Lm			-DA DALI
	-42	42W ~3990Lm	-1260 1200x600mm		-DV 1-10V Dimmable
	-60	60W ~5630Lm			
	-15	15W ~1275Lm			
	-18	18W ~1570Lm	-6030 600x300mm		
	-20	20W ~1817Lm			

DIMENSIONAL DIAGRAM

