

# PULSAR

## HLE34 - LED HIGHBAY



With a robust design and high output, the Pulsar highbay from Vision Lighting makes industrial lighting simple.


Constructed to IP65 from a die-cast aluminium body designed for optimal heat dissipation, the Pulsar incorporates high quality LED componentry including Meanwell driver and Philips LEDs for a >130Lm/W output.

Optional reflector accessories are available for a greater range beam angles. Perfect for industrial commercial applications, the Pulsar is suited for use in warehouses, factories, garages and workshops.



### PRODUCT SPECIFICATIONS

<b>Wattage:</b>	100 / 150 / 200 / 240W
<b>Lumens:</b>	~13000 / 19000 / 27500 / 30500Lm
<b>Efficacy:</b>	~130Lm/W
<b>CCT:</b>	4000K
<b>CRI:</b>	Ra>80
<b>Beam Angle:</b>	110° / 60° or 90° using reflector
<b>Dimming:</b>	DALI Available
<b>Material:</b>	Die-Cast Aluminium
<b>IP Rating:</b>	IP65
<b>IK Rating:</b>	IK10
<b>Mounting:</b>	Hook Mount
<b>Lifetime:</b>	L80B10 74,000hrs/L90B50 59,000hrs

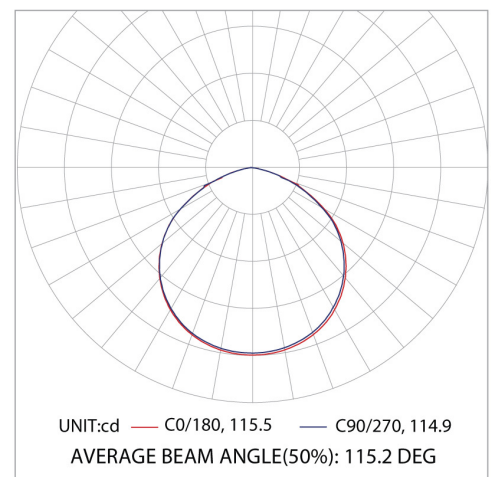

# PULSAR

## HLE34 - LED HIGHBAY


### CODING MATRIX

Family	Power	Lumens	CCT	CRI	Dimming
<b>HLE34</b>	<b>-100</b>	100W	13123Lm	<b>-4K</b>	4000K
	<b>-150</b>	150W	19185Lm	<b>(Blank)</b>	Ra>80
	<b>-200</b>	200W	27545Lm	<b>-9</b>	Ra>90
	<b>-240</b>	240W	30696Lm		


Accessories	Material	Beam Angle
<b>HLE34-REF</b>	<b>-PC</b> Polycarbonate	<b>-90</b> 90 Degree
	<b>-AL</b> Aluminium	<b>-60</b> 60 Degree

### DIMENSIONAL DIAGRAM

100W

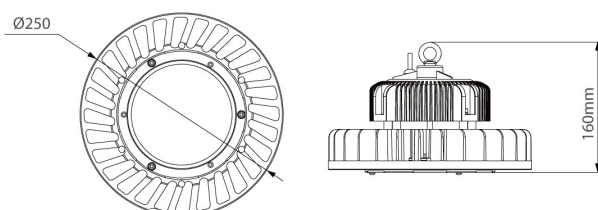

150W / 200W / 240W

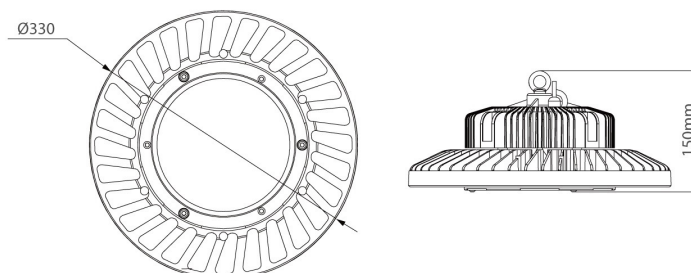

# PULSAR

## HLE34 - LED HIGHBAY

### ATTACHMENTS AVAILABLE

As a standalone fitting, the HLE34 has a beam angle of 110 Degrees. Using the reflector attachments we are also able to achieve 60 degree and 90 degree beam angle for greater flexibility in design.



### MOUNTING BRACKET OPTION FOR 330MM VARIANT

