

GARRISON

VAN11 - SURFACE MOUNT VANDAL RESISTANT LUMINAIRE




Designed to endure punishing conditions, the Garrison fitting from Vision Lighting provides durable and secure lighting.

Constructed to IP65 and IK10 from a zinc-plated steel body, and including stainless steel security screws, the Garrison is ideal for settings that call for vandal resistant lighting such as prisons, underground car parks and mental health facilities.

Not only a robust build, the Garrison is also available in DALI and uses high quality LED components offering high CRI and lifetime ratings.

PRODUCT SPECIFICATIONS

Wattage:	10 - 54W
Lumens:	1162 - 7023Lm
CCT:	3000K, 4000K
CRI:	Ra>80
Beam Angle:	120°
Dimming:	DALI option
Material:	Zinc-plated sheet steel
Diffuser:	4mm Opal Polycarbonate
Colour:	White
IP Rating:	IP65
IK Rating:	IK10+
Mounting:	Surface Mount
Lifetime:	L80 B50 100,000hrs

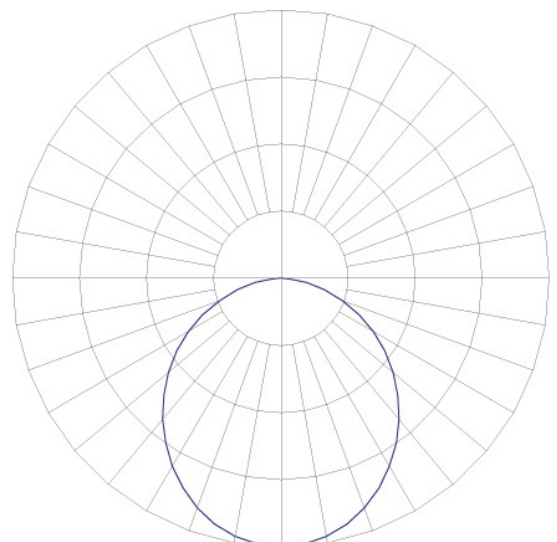


GARRISON

VAN11 - SURFACE MOUNT VANDAL RESISTANT LUMINAIRE

CODING MATRIX

Family	Length	Power	Lm (3000K)	Lm (4000K)	CCT	Dimming				
VAN11	-04	380mm	-10	10.2W	1162Lm	1226Lm	-3K	3000K	(Blank)	None
			-13	12.8W	1468Lm	1548Lm	-4K	4000K	-DA	DALI
	-06	660mm	-14	13.7W	1598Lm	1685Lm				
			-19	18.8W	2356Lm	2334Lm				
			-22	21.8W	2751Lm	2899Lm				
	-09	940mm	-20	20.1W	2398Lm	2528Lm				
			-28	27.6W	3321Lm	3502Lm				
			-32	32.4W	3998Lm	4214Lm				
	-12	1220mm	-25	24.5W	2953Lm	3113Lm				
			-37	37.2W	4429Lm	4668Lm				
			-43	43.3W	5331Lm	5619Lm				
	-15	1500mm	-31	30.7W	3691Lm	3891Lm				
			-41	40.9W	5023Lm	5295Lm				
			-46	45.5W	5507Lm	5805Lm				
			-54	54.1W	6663Lm	7023Lm				

DIMENSIONAL DIAGRAM

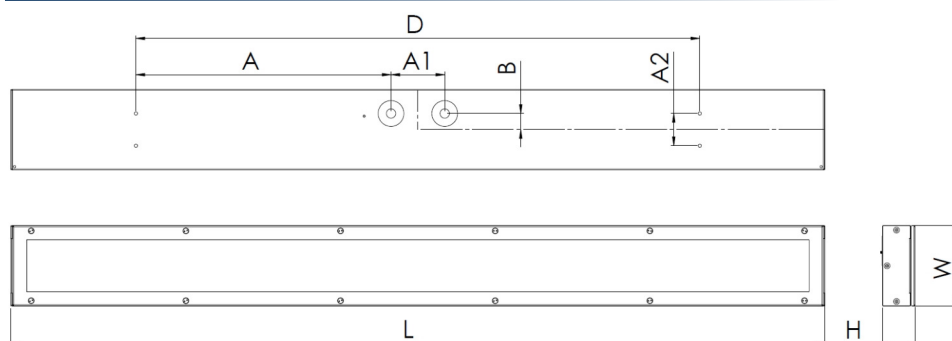

L, mm	W, mm	H, mm	D, mm	A, mm	A ₁ , mm	A ₂ , mm	B, mm
380	135	60	300	100	100	80	30
660			450	175			
940			600	250			
1220			900	400			
1500			1050	525			